

Tabs 플러그인

추가 참조: [Page Tabs 플러그인](#)

이 위키 플러그인 을 사용하여 위키 페이지에 탭으로 콘텐츠를 배열하십시오.

매개변수

Arrange content in tabs

Introduced in Tiki 4. Required parameters are in **bold**.

[Go to the source code](#)

Preferences required: `wikiplugin_tabs`

Parameters	Accepted Values	Description	Default	Since
(body of plugin)		Tabs content, separated by "/////"		
tabs	text	Pipe-separated list of tab titles. Example: <code>tab 1 tab 2 tab 3</code>		4.0
panelbgcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
panelbordercolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
panelborderwidth	text	To change the width of panel border in pixels (1 by default). For example: 3 for 3 pixels	1	25.0
panelfontsize	text	To set the size of the text in pixels. For example: 20 for 20 pixels	16	25.0
paneltextcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
tabactivebgcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
tabactivetextcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
tabbgcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
tabbordercolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: <code>#000</code> or <code>rgba(00, 00, 00, 0.5)</code> .		25.0
tabborderwidth	text	To change the width of tabs border in pixels (1 by default). For example: 3 for 3 pixels	1	25.0

tabfontsize	text	To set the size of the tabs text in pixels. For example: 20 for 20 pixels	16	25.0
tabtextcolor	text	Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5).		25.0
name	text	Unique tabset name (if you want the last state to be remembered). Example:user_profile_tabs		4.0
inside_pretty	(blank) n y	Parse pretty tracker variables within tabs	n	8.0
panelborderstyle	(blank) none hidden dotted dashed solid double groove ridge inset outset	Determine the kind of border to apply to the panels	none	25.0
panelfontweight	(blank) normal bold bolder lighter 900	Use to define the thickness of the text characters to be displayed in the panels	normal	25.0
paneltextstyle	(blank) normal italic oblique	Use to change the panels text style	normal	25.0
tabborderstyle	(blank) none hidden dotted dashed solid double groove ridge inset outset	Determine the kind of border to apply to the tabs	none	25.0
direction	(blank) horizontal vertical	Change direction of tabs (horizontal by default).	horizontal	25.0
tabfontstyle	(blank) normal italic oblique	Use to specify the font style of the tabs text	normal	25.0
tabfontweight	(blank) normal bold bolder lighter 900	Use to define the thickness of the text characters to be displayed in the tabs	normal	25.0

toggle	(blank) y n	Allow toggling between tabs and no-tabs view	y	8.0
--------	-------------------	--	---	-----

예제

다음 코드는:

```
{TABS(name="user_tabset_01", tabs="제목 1|제목 2|제목3")}이는 첫번째 탭의 컨텐츠입니다 ///// 이것은 두번째 탭의 컨텐츠입니다 ///// 이것은 세번째 탭의 컨텐츠입니다 {TABS}
```

다음의 결과를 야기합니다:


이는 첫번째 탭의 컨텐츠입니다

이것은 두번째 탭의 컨텐츠입니다

이것은 세번째 탭의 컨텐츠입니다

탭 이름을 클릭할 때, 각 탭의 컨텐츠가 로드되며 브라우저 창을 새로고침하지않고 서버에 연결하지 않고 표시됩니다.

그리고, "**No Tabs**" 선택사항을 클릭하면, 표시가 다음과 같이 변경됩니다:

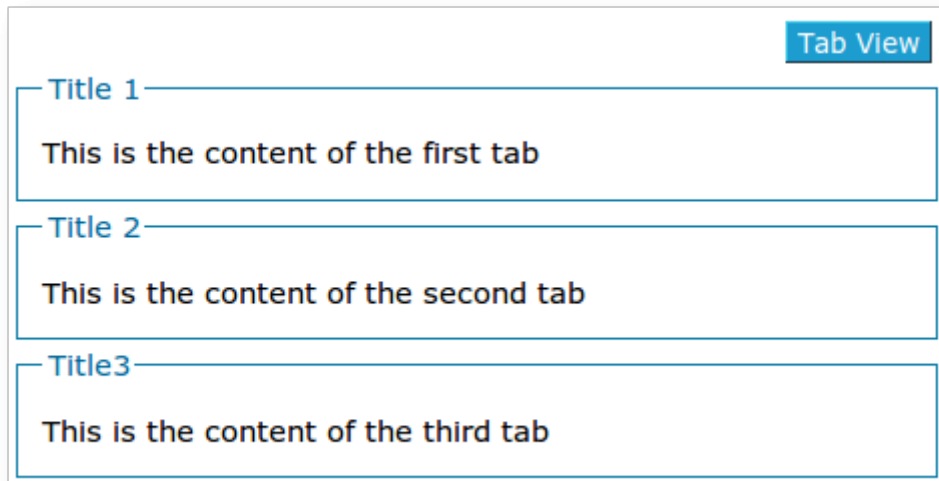

Related pages

- [Wiki Plugin](#) - has links to all plugins and describes how the syntax works for a plugin
- [Mods Type Wikipugins](#)

별칭

[tabs](#)플러그인 | [tab](#)플러그인 | [Tab](#)플러그인 | [Tabs](#) 플러그인 | [tabs](#) 플러그인 | [탭](#) 플러그인