


Trackers Admin

To access: Click the **Tracker** icon  on the [Admin Panel](#) or Access <http://example.org/tiki-admin.php?page=trackers>

To administer Trackers, first click the "**Admin (Click!)**" menu to display the Tiki Admin Panel, as shown in this graphic:




TRACKERS



Trackers

From the Tiki Admin Panel, click the Trackers icon to display its settings panel, the top of which appears like so:

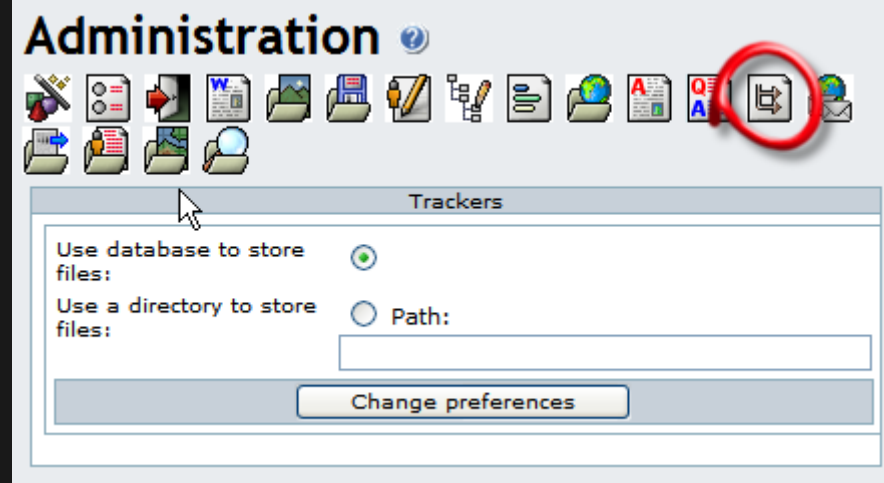

CONFIGURE TRACKERS

Trackers can have attached files. In this panel you can set up where to store attached files (if a tracker allows it). You can store attachments in the database or a directory. The directory **path** can be absolute (example: */foo/bar/uploads/*) or relative to the Tiki directory (example: *files/*). The **trailing slash** is mandatory.

Here you can:

- Set the file storage location to either the Tiki database or a directory on your web server's hard disk.

USE DATABASE TO STORE FILES

USE A DIRECTORY TO STORE FILES

Tracker Attachment Storage: Trackers can be set up to allow file attachments, which will be stored in either the Tiki database or in a directory on your webserver's hard disk. Storing files inside your database is OK for small files or a low volume of files, but

a folder is recommended for a high volume site or when your files are relatively large.

Note the **mandatory** trailing forward slash on the path, shown here in red. The path you specify can be absolute:

```
/home/cogley/www/uploads/tikiimg/rm/
```


... or relative to your Tiki's install directory:

```
trackeruploads/
```

Path characteristic checklist:

- Has a trailing slash.
- For best security, is specified from the root, and is in a separate folder from Tiki.
- Has its permissions set (e.g. via the `chmod` command from the command line or in your FTP client software) to allow uploads by the webserver user.
- Has enough space to allow storage of your expected file volume.

If you take a look at your folder after uploading some images, you can see that Tiki randomizes the filenames, as shown in this graphic:

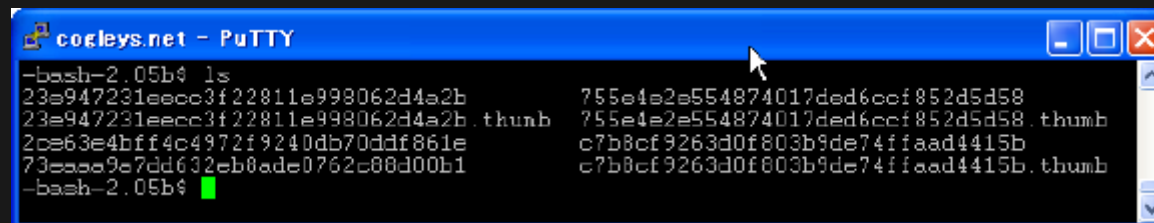

```
cogleys.net - PuTTY
-bash-2.05b$ ls
23e947231eccc3f22811e998062d4a2b      755e4e2e554874017ded6ccf852d5d58
23e947231eccc3f22811e998062d4a2b.thumb 755e4e2e554874017ded6ccf852d5d58.thumb
2ce63e4bff4c4972f9240db70ddf861e     c7b8cf9263d0f803b9de74ffaad4415b
73eaaa9e7dd632eb8ade0762c88d00b1     c7b8cf9263d0f803b9de74ffaad4415b.thumb
-bash-2.05b$
```

Troubleshooting Tip: If you are having trouble with file uploads, you can edit settings in your `php.ini`, or, place an `.htaccess` file in the root of your tiki installation.

```
# Override PHP.ini variables, which can be viewed using phpinfo:

<IfModule mod_php4.c>
# If you are using Apache 2, you have to use <IfModule sapi_apache2.c>
# instead of <IfModule mod_php4.c>.

php_value max_execution_time 300
php_value upload_max_filesize "10M"
php_value memory_limit "32M"
php_value session.cache_expire 20000
php_value session.gc_maxlifetime 20000
php_value session.cookie_lifetime 20000
</IfModule>

# Zero means unlimited request body size:
LimitRequestBody 0
```

[More documentation](#)

[Related Information](#)

- To enable Trackers for your site, see [General Admin](#).
- To specify permissions for Tracker users, see [Permissions](#) for the general procedure.
- For information on using Trackers, see [Tracker User](#).
- For technical details, see [Tracker Details](#).
- [Mirror Trackers](#)

[Useful Links](#)

- Apache WWW Server htaccess tutorial:
<http://httpd.apache.org/docs/howto/htaccess.html>
- PHP htaccess information:
<http://jp2.php.net/configuration.changes>

- Absolute Path Glossary Entry

http://linux.about.com/cs/linux101/g/absolute_path.htm

ALIAS

- Trackers-Admin