

## Plugin Versions

Use this [Wiki Plugin](#) to divide a [wiki](#) page into separate "versions." Tiki will display a navigation box that allows users to display each version of the page. For example, you can use this plugin to separate a single wiki page into Release 1, Release 2, and Release 3 information.

## Parameters

Create tabs for showing alternate versions of content

*Introduced in Tiki 1.*

[Go to the source code](#)

*Preferences required:* `wikiplugin_versions`

| Parameters           | Accepted Values   | Description   | Default | Since |
|----------------------|-------------------|---|---------|-------|
| (body of plugin)     |                   | Block of text separated by <code>-(version x)-</code> markers. Text before the first marker is used by default.       |         |       |
| <code>default</code> |                   | Specifies version label to show when displaying the page for the first time. Default label is 'Default'               | Default | 1     |
| <code>nav</code>     | (blank)<br>y<br>n | Display a navigation box that allows users to select a specific version to display.                                   | n       | 1     |
| <code>title</code>   | (blank)<br>y<br>n | Display the current version name as the title. No title shows when <code>nav="y"</code> ; otherwise shows by default. | y       | 1     |

## Notes

- If you use [Wiki Config](#) wiki page caching, this plugin may not render properly.
- The "versions" used for this plugin are different than the "versions" stored in the [wiki page history](#).

## Examples

To separate different versions of text use: 3 dashes (hyphens), followed by the version label in parenthesis, followed by at least 3 other dashes or hyphens. For example:

```
---(version 3)-----
```

## Basic example

*This code:*

```
{VERSIONS(nav="y" title="y")}
```

This is the default text

```
---(version 3)-----
```

This is version 3 info

```
---(version 2)-----
```

This is version 2 info

```
---(version 1)-----
```

This is version 1 info

{VERSIONS}

Would produce:

This is the default text

## More Examples

This code:


```
{VERSIONS(nav="n")} This is the default text ---(version 3)----- This is version  
3 info ---(version 2)----- This is version 2 info ---(version 1)-----  
This is version 1 info {VERSIONS}
```

Would produce:

### Default

This is the default text

Sample usage in conjunction with [PluginTracker](#) and [PluginTrackerList](#) (these are Screenshots):

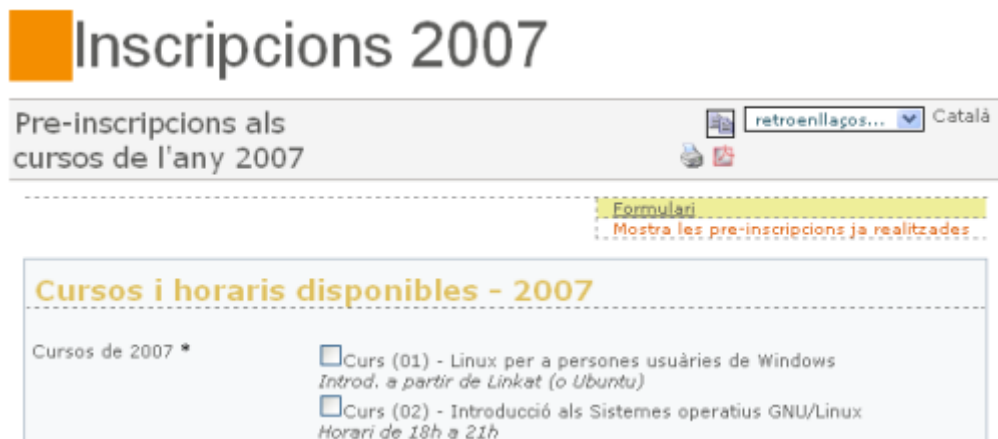

The screenshot shows a web page for 'Inscripcions 2007'. The main heading is 'Inscripcions 2007' with an orange square icon. Below it, there's a sub-heading 'Pre-inscripcions als cursos de l'any 2007'. To the right, there's a search bar with 'retroenllaços...' and a dropdown menu set to 'Català'. Below the search bar, there's a yellow button labeled 'Formulari' and a red link 'Mostra les pre-inscripcions ja realitzades'. The main content area is titled 'Cursos i horaris disponibles - 2007' and lists two courses: 'Curs (01) - Linux per a persones usuàries de Windows' and 'Curs (02) - Introducció als Sistemes operatius GNU/Linux'. The first course has a checkbox and a sub-heading 'Introd. a partir de Linkat (o Ubuntu)'. The second course has a checkbox and a sub-heading 'Horari de 18h a 21h'.

Default text: Formulari, using PluginTracker

# Inscripcions 2007

Pre-inscripcions als  
cursos de l'any 2007



retroenllaços...

Català



Formulari

Mostra les pre-inscripcions ja realitzades

## Linux per a persones usuàries de Windows. Introducció a partir de Linkat (o Ubuntu)

| Horari: Si no et va bé l'actual, quin t'aniria millor? | Nom        | Cognoms       | Prioritat segons "fractura digital" FTIC | creat                      |
|--|------------|---------------|--|----------------------------|
|  | Luis Jaime | Ortiz Vasquez | 3  | Dm 09 de Jan, 2007 [12:57] |
|  | MERCE      | BONDIA BOVE   | 3  | Dv 12 de Jan, 2007 [19:22] |

Alternate version: Mostra les pre-inscripcions ja realitzades, , using PluginTrackerList

## Alias

- [PluginVersion](#)