

Show.t.o Tracker Field

This is a [stub](#)

This field is initially for creating show.tiki.org instances in our bug tracker at <https://dev.tiki.org/tracker5>

It can be useful in other scenarios where Tiki instances need to be created on the fly upon user request, for training, or other purposes.

A more generic [field type](#) is [Tiki Manager Tracker Field](#)

Requirements

SSH2 extension for PHP needs to be installed for show.tiki.org feature to work

```
sudo apt-get install libssh2-php
```

or with newer distributions like ubuntu 20.04 it is:

```
sudo apt-get install php-ssh
```

How to set it up

dev.t.o/ -> 2 pages about show. Concept is described.

1. <https://dev.tiki.org/show.tiki.org+Overview>
2. <https://dev.tiki.org/show.tiki.org>

doc/devtools/tim
Tiki Instance Manager


user "control" ("ctrl")

scripts usually located in:

```
/usr/local/sbin/
```

Tracker field type show.t.o:
open that and set it up to use localhost

How to use it

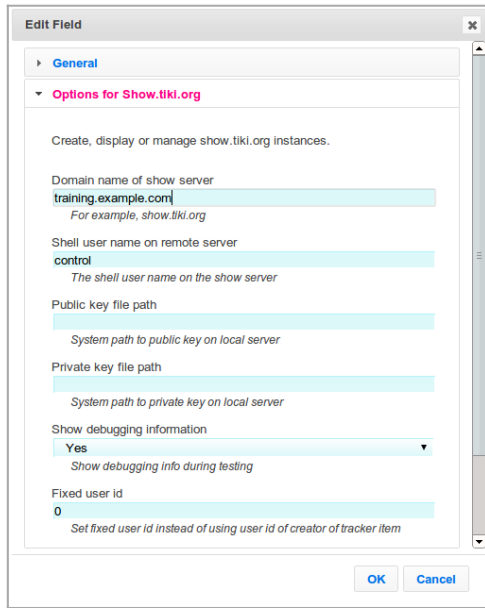

The screenshot shows a dialog box titled "Edit Field" with a close button (X) in the top right corner. The dialog is divided into two sections: "General" and "Options for Show.tiki.org". The "Options for Show.tiki.org" section is expanded and contains the following fields:

- Domain name of show server: (with a note: "For example, show.tiki.org")
- Shell user name on remote server: (with a note: "The shell user name on the show server")
- Public key file path:
- Private key file path: (with a note: "System path to private key on local server")
- Show debugging information: (with a note: "Show debugging info during testing")
- Fixed user id: (with a note: "Set fixed user id instead of using user id of creator of tracker item")

At the bottom of the dialog are "OK" and "Cancel" buttons.

Click to expand

Alias names for this page

[show.t.o](#) | [show.tiki.org](#) | [show.tikiwiki.org](#)