

# Tabs 플러그인

추가 참조: [Page Tabs 플러그인](#)

이 위키 플러그인 을 사용하여 위키 페이지에 탭으로 콘텐츠를 배열하십시오.

## 매개변수

Arrange content in tabs  
Introduced in Tiki 4. Required parameters are in **bold**.  
[Go to the source code](#)  
Preferences required: `wikiplugin_tabs`

| Parameters         | Accepted Values | Description                                                                                                                   | Default | Since |
|--------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------|---------|-------|
| (body of plugin)   |                 | Tabs content, separated by "/////"                                                                                            |         |       |
| <b>tabs</b>        | text            | Pipe-separated list of tab titles. Example: <b>tab 1 tab 2 tab 3</b>                                                          |         | 4.0   |
| panelbgcolor       | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| panelbordercolor   | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| panelborderwidth   | text            | To change the width of panel border in pixels (1 by default). For example: 3 for 3 pixels                                     | 1       | 25.0  |
| panelfontsize      | text            | To set the size of the text in pixels. For example: 20 for 20 pixels                                                          | 16      | 25.0  |
| paneltextcolor     | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| tabactivebgcolor   | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| tabactivetextcolor | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| tabbgcolor         | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| tabbordercolor     | text            | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |         | 25.0  |
| tabborderwidth     | text            | To change the width of tabs border in pixels (1 by default). For example: 3 for 3 pixels                                      | 1       | 25.0  |

|                  |                                                                                    |                                                                                                                               |            |      |
|------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------|------|
| tabfontsize      | text                                                                               | To set the size of the tabs text in pixels. For example: 20 for 20 pixels                                                     | 16         | 25.0 |
| tabtextcolor     | text                                                                               | Enter a valid CSS color hex code, or an RGBA value if setting opacity is desired; for example: #000 or rgba(00, 00, 00, 0.5). |            | 25.0 |
| name             | text                                                                               | Unique tabset name (if you want the last state to be remembered). Example:user_profile_tabs                                   |            | 4.0  |
| inside_pretty    | (blank)<br>n<br>y                                                                  | Parse pretty tracker variables within tabs                                                                                    | n          | 8.0  |
| panelborderstyle | (blank)  none  hidden  dotted  dashed  solid  double  groove  ridge  inset  outset | Determine the kind of border to apply to the panels                                                                           | none       | 25.0 |
| panelfontweight  | (blank)<br>normal<br>bold<br>bolder<br>lighter<br>900                              | Use to define the thickness of the text characters to be displayed in the panels                                              | normal     | 25.0 |
| paneltextstyle   | (blank)<br>normal<br>italic<br>oblique                                             | Use to change the panels text style                                                                                           | normal     | 25.0 |
| tabborderstyle   | (blank)  none  hidden  dotted  dashed  solid  double  groove  ridge  inset  outset | Determine the kind of border to apply to the tabs                                                                             | none       | 25.0 |
| direction        | (blank)<br>horizontal<br>vertical                                                  | Change direction of tabs (horizontal by default).                                                                             | horizontal | 25.0 |
| tabfontstyle     | (blank)<br>normal<br>italic<br>oblique                                             | Use to specify the font style of the tabs text                                                                                | normal     | 25.0 |
| tabfontweight    | (blank)<br>normal<br>bold<br>bolder<br>lighter<br>900                              | Use to define the thickness of the text characters to be displayed in the tabs                                                | normal     | 25.0 |

|        |                   |                                              |   |     |
|--------|-------------------|----------------------------------------------|---|-----|
| toggle | (blank)<br>y<br>n | Allow toggling between tabs and no-tabs view | y | 8.0 |
|--------|-------------------|----------------------------------------------|---|-----|

## 예제

다음 코드는:

```
{TABS(name="user_tabset_01", tabs="제목 1|제목 2|제목3")}이는 첫번째 탭의 컨텐츠입니다 ///// 이것은 두번째 탭의 컨텐츠입니
다 ///// 이것은 세번째 탭의 컨텐츠입니다 {TABS}
```

다음의 결과를 야기합니다:


이는 첫번째 탭의 컨텐츠입니다

이것은 두번째 탭의 컨텐츠입니다

이것은 세번째 탭의 컨텐츠입니다

탭 이름을 클릭할 때, 각 탭의 컨텐츠가 로드되며 브라우저 창을 새로고침하지않고 서버에 연결하지 않고 표시됩니다.

그리고, "**No Tabs**" 선택사항을 클릭하면, 표시가 다음과 같이 변경됩니다:

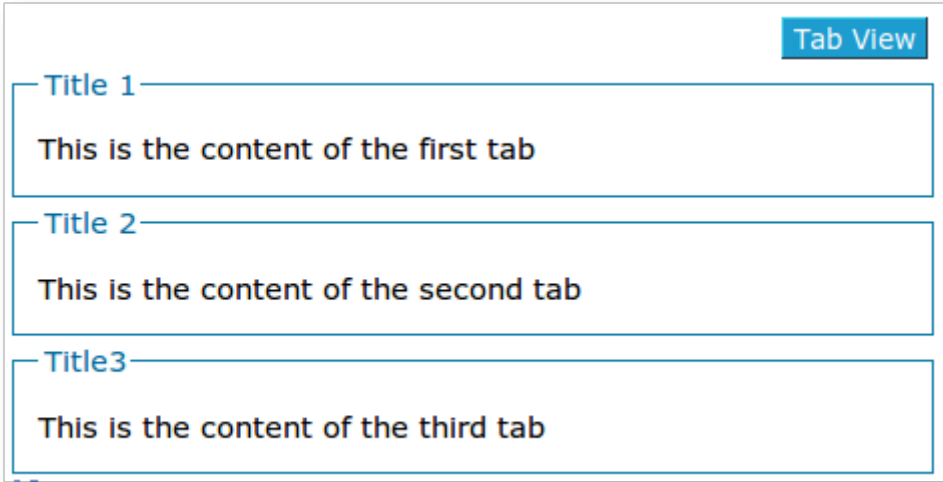

## Related pages

- [Wiki Plugin](#) - has links to all plugins and describes how the syntax works for a plugin
- [Mods Type Wikiplugins](#)

## 별칭

[tabs플러그인](#) | [tab플러그인](#) | [Tab플러그인](#) | [Tabs 플러그인](#) | [tabs 플러그인](#) | [탭 플러그인](#)