

Dynamic items list

Basic documentation

Function: Dynamically updates a selection list based on linked data from another tracker.

Usage: trackerId,filterFieldIdThere,filterFieldIdHere,listFieldIdThere,statusThere

Description:

trackerId	is the ID of the tracker to link with;
filterFieldIdThere	is the field you want to link with in that tracker;
filterFieldIdHere	is the field you want to link with in the current tracker;
listFieldIdThere	is the field ID you wish to pull the selection list from, based on the value selected in filterFieldIdHere matching field(s) in filterFieldIdThere;
statusThere	restricts values appearing in the list to those coming from records in the other tracker that meet specified statuses of [o p c] or in combination (op, opc);

multiple options must appear in the order specified, separated by commas.

to be tested filterFieldHere can be an item link, a user selector, a group selector, a country selector, a dynamic list

Tutorial

With Tiki's [trackers](#), you can create dynamic forms, in which field options change automatically, depending on other selections.

In this tutorial, you will create a dynamic tracker that users will complete to enter their operating system and version number. Depending on the operating system that they choose (Windows or Solaris), different version options will appear.

You will actually need to build two trackers: an "internal" tracker to hold the dynamic options, and an "external" tracker from which the user will make their selections.


Step 1: Build the "internal" tracker for the selectable options

1. Create a new tracker.

In this example, since the selectable options are for an "operating system", we will name the tracker **Operating System**.

Record the ID number for this tracker. We'll refer to this tracker as the **Option Tracker ID**.

In this example, the ID is **6**.

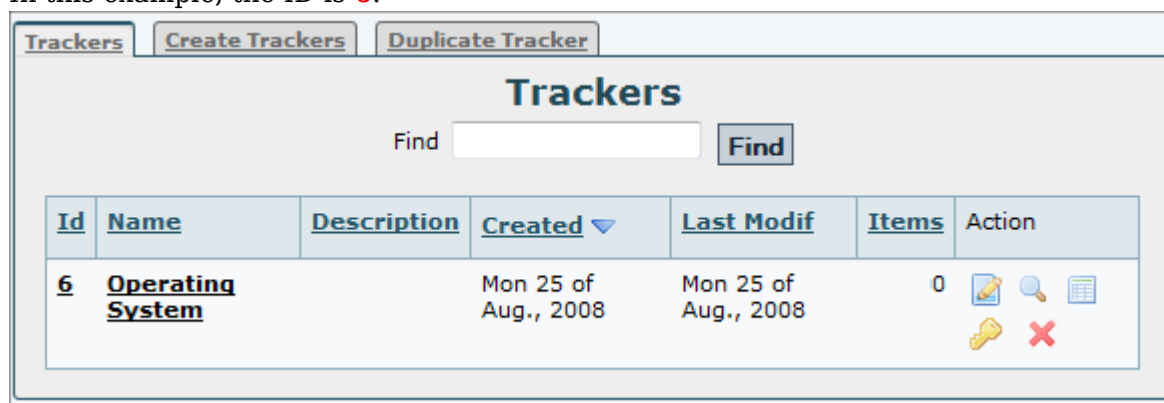

2. Create a field with the name **OS**, of type **drop down**, with the options **Windows,Solaris**.

Record the ID number for this field. We'll refer to this field as the **Option Tracker Choices ID**. In

this example, the ID is **8**.

3. Create a field with the name **Version** of type **text** for this tracker.

Record the ID number for this field. We'll refer to this field as the **Option Tracker Versions ID**. In this example, the ID is **9**.

Id	Position	Name	Type	Options	IsMain	Multilingual	Tbl vis	Searchable	Public	Hidden	Mandatory	Description
8	1	OS	drop down	Windows,Solaris	y	n	y	y	y	n	n	
9	2	Version	text field		y	n	y	y	y	n	n	

Step 2: Populate the "internal" tracker.

Now that you've built the tracker to hold the options, you need to populate the tracker with the valid choices.

1. From the Trackers listing page, click the **Option Tracker** tracker that you just created.
2. Click **Insert new Item**.
3. Populate the valid OS versions.
In the OS field, select **Windows**.
In the Version field, type **Vista**.

Tracker: Operating System

List Trackers | Insert New Item | Admin Trackers | Edit This Tracker | Edit Fields

Tracker Items for Operating System | Insert New Item

Insert New Item

OS: Windows

Version: Vista

Save | View inserted item

Fields marked with a * are mandatory.

4. Repeat these steps to enter all of the valid combinations that to allow (for example: Windows XP, Solaris 2.9, and so on).

Tracker: Operating System

List Trackers | Insert New Item | Admin Trackers | Edit This Tracker | Edit Fields

Tracker Items for Operating System | Insert New Item

Choose a filter

Items found: 5

<input type="checkbox"/>	OS	Version	Action
<input type="checkbox"/>	Windows	XP	X
<input type="checkbox"/>	Windows	Vista	X
<input type="checkbox"/>	Windows	95	X
<input type="checkbox"/>	Solaris	2.9	X
<input type="checkbox"/>	Solaris	2.10	X

Perform action with checked: ... OK

Page: 1/1
1

Step 3: Create the "external" user tracker

Now you need to create the actual tracker the will contain the selectable options that you defined.

1. Create a new tracker.

In this example, we will name the tracker **User Profile**.

2. Create a field with the name **Operating System**, of type **item link** with the options: **Option Tracker ID, Option Tracker Choices ID**

You created these IDs in [Step 1](#). In this example, the options are: **6 , 8**.

This is the selector from which the users will select their operating system (Windows or Solaris).

Record the ID number for this field. We'll refer to this field as the **User OS Choices ID**. In this example, the ID is **10**.

3. Create a field with the name **Version**, of type **dynamic items list**, with the options: **Option Tracker ID, Option Tracker Choices ID, User OS Choices ID, Option Tracker Versions ID**

In this example, the options are: **6 , 8 , 10 , 9**.

4. Create a field with the name **Your name**, of type **text**.

This will simply be a field for users to enter their names.

Id	Position	Name	Type	Options	isMain	Multilingual	Tbl vis	Searchable	Public	Hidden	Mandatory	Description
10	1	Operating System	item link	6,8	y	n	y y	y	y	n	n	
11	2	Version	dynamic items list	6,8,10,9	y	n	y y	y	n	n		
12	4	Your name	text field		y	y	y y	y	n	n		

Test the tracker

Now you can test the "user" tracker (named **User Profile** in this example).

1. From the Trackers listing page, click the **User Profile** tracker that you just created.
2. Click **Insert new Item**.

Notice that the **Version** field is empty.

3. In the **Operating System** field, select **Windows**.

Notice that the **Version** field is now populated with the Windows options (Vista, XP, and 95).

Tracker Items for User Profile | Insert New Item

Insert New Item

Save

Operating System: Windows

Version: 95, Vista, XP

Your name:

View inserted item

Fields marked with a * are mandatory.

4. Change the **Operating System** field to **Solaris**.

Notice that the **Version** field is now populated with the Solaris options (2.9 and 2.10).

Tracker Items for User Profile | Insert New Item

Insert New Item

Save

Operating System: Solaris

Version: 2.10, 2.9

Your name:

View inserted item

Fields marked with a * are mandatory.

Final notes

- [Chained use of the dynamic list item type in trackers](#) does not work at the moment (Tiki5.0Beta1).
Vote for the issue if you feel it is important.
- [Categories](#) might be an alternative for you.

See also

[Plugin JQuery](#)

Backlinks:

One page links to [Dynamic items list](#)

- [Items List and Item Link Tracker Fields](#)

Alias names for this page:

[Dynamic items lists](#) | [Dynamic item lists](#) | [Dynamic item list](#) | [Dynamic_items_list](#)