

See also [Front-ends to Tracker data](#)

Plugin PivotTable

Introduced in [Tiki 16.2](#)

Use this [wiki plugin](#) to create dashboards with summaries of data in Tiki objects through the [unified search index](#) to produce a pivot table report of your choice. Initially this plugin works with [tracker data](#), but other Tiki objects can be connected later with this plugin. Results for the variables of interest (tracker fields, as well as creation_date, modification_date and tracker_status of the items) are aggregated by criteria selected by the user.

It produces the [JavaScript Pivot Table \(aka Pivot Grid, Pivot Chart, Cross-Tab\) implementation from Nicolas Kruchten](#) with drag'n'drop (see [the list of changes in each version](#)).

Parameters

Create and display data in pivot table for reporting

Introduced in [Tiki 16.1](#). Required parameters are in **bold**.

[Go to the source code](#)

Preferences required: wikiplugin_pivottable

Parameters	Accepted Values	Description	Default	Since
(body of plugin)		Leave one space in the box below to allow easier editing of current values with the plugin popup helper later on		
data	text <i>separator:</i> <code>:</code>	For example 'tracker:1' or 'activitystream'	0	
dataCallback	text	Pass a custom javascript function to tweak the final layout and data traces before rendering them.		24.7
chartTitle	text	Override title when using Chart renderers.		16.3
menuLimit	digits	Pivottable menuLimit option override - number of entries to consider the menu list too big when filtering on a particular column or row.		16.2
inclusions	text	Filter values for fields in rows or columns. Contains JSON encoded object of arrays of strings.		

<code>xAxisLabel</code>	text	Override label of horizontal axis when using Chart renderers.		16.3
<code>yAxisLabel</code>	text	Override label of vertical axis when using Chart renderers.		16.3
<code>aggregateDetailsFormat</code>	text	Uses the translate function to replace %0 etc with the aggregate field values. E.g. "%0 any text %1"		22.1
<code>aggregateDetailsCallback</code>	text	Use custom javascript function to build the aggregate details popup window.		24.1
<code>colOrder</code>	text	The order in which column data is provided to the renderer, must be one of "key_a_to_z", "value_a_to_z", "value_z_to_a", ordering by value orders by column total.	key_a_to_z	
<code>height</code>	word	Height of charts. You have to only put the value (Unit: px). For instance, use <code>500</code> for 500 pixels.	400px	
<code>lang</code>	text	This helps to avoid pivotUI missing the choosen aggregator next time you change the site language. Default value: "site" if you want to keep using the site language	site	26
<code>rowOrder</code>	text	The order in which row data is provided to the renderer, must be one of "key_a_to_z", "value_a_to_z", "value_z_to_a", ordering by value orders by row total.	key_a_to_z	
<code>highlightChartType</code>	text			24.7
<code>width</code>	word	Width of charts. You have to only put the value (Unit: px). For instance, use <code>500</code> for 500 pixels.	100%	

aggregateDetails	text separator: :	When enabled, clicking a table cell will popup all items that were aggregated into that cell. Specify the name of the field or fields to use to display the details separated by colon. Enabled by default. To disable, set contents to an empty string.		16.2
aggregatorName	Count Count Unique Values List Unique Values Sum Integer Sum Average Minimum Maximum Sum over Sum 80% Upper Bound 80% Lower Bound Sum as Fraction of Total Sum as Fraction of Rows Sum as Fraction of Columns Count as Fraction of Total Count as Fraction of Rows Count as Fraction of Columns	Function to apply on the numeric values from the variables selected.	Count	
allowStickyHeaders	(blank) n y	Sticky Headers for the Pivot Table when scrolling top or left Default value: No	n	26
chartHoverBar	y n	Display the Chart hover bar or not.	y	16.3
heatmapColors	text separator: :			17
highlightGroupColors	text separator: :			18.1

highlightRequest	text separator: :	Highlight items' values matching those coming from request like a search form POST. List pairs of tracker field names and incoming request variable names separated by a dash.		24.7
highlightGroup	(blank) y n	Highlight items' values belonging to one of my groups in Charts.	n	16.3
highlightMine	(blank) y n	Highlight owned items' values in Charts.	n	16.3
displayBeforeFilter	(blank) n y	Load PivotTable results on initial page load even before applying "editable" filters. Turn this off if you have a large data set and plan to use "editable" filters to dynamically filter it. Default value: Yes	y	21.1
overridePermissions	(blank) y n	Return all tracker items ignoring permissions to view the corresponding items.	n	18.1

rendererName

Table| Table

Display format of data

Table

Bar chart|

Heatmap| Row

Heatmap| Col

Heatmap| Line

Chart| Bar Chart|

Overlay Bar Chart|

Stacked Bar Chart|

Relative Bar Chart|

Boxplot Chart|

Horizontal Boxplot

Chart| Area Chart|

Histogram|

Density

Histogram|

Percent

Histogram|

Probability

Histogram|

Density Histogram

Horizontal|

Percent Histogram

Horizontal|

Probability

Histogram

Horizontal|

Horizontal

Histogram|

Histogram2D|

Density

Histogram2D|

Percent

Histogram2D|

Probability

Histogram2D|

Density

Histogram2D

Horizontal|

Percent

Histogram2D

Horizontal|

Probability

Histogram2D

Horizontal|

Horizontal

Histogram2D|

Scatter Chart|

Treemap

<code>translate</code>	(blank) n y	Use translated data values for calculations and display. Default value: No	n	18.3
<code>vals</code>	text <i>separator:</i> :	Variable with numeric values or tracker field permNames, on which the formula from the aggregator is applied. It can be left empty if aggregator is related to Counts. Use permanentNames in case of tracker fields, separated by : in case of multiple fields function.		
<code>heatmapDomain</code>	text <i>separator:</i> :			17
<code>cols</code>	text <i>separator:</i> :	Which field or fields to use as table columns. Leaving blank will use the first available field. Use permanentNames in case of tracker fields. Separated by colon (:) if more than one.		
<code>rows</code>	text <i>separator:</i> :	Which field or fields to use as table rows. Leaving blank will remove grouping by table rows. Use permanentNames in case of tracker fields. Separated by colon (:) if more than one.		

Notes on **aggregateDetails**:

- The `aggregateDetails` accepts multiple field names or `permNames` separated by colon.
- The `aggregateDetails` parameter is also enabled by default and can be disabled setting `aggregateDetails` to an empty string.
- Each item has the associated `object_link` available by default and clickable in the popup where the `aggregateDetails` field data is shown.
 - It will work with other unified search index content entries (not only tracker items) but might be slow for large result sets.
 - It is only activated if `aggregateDetails` is not disabled. Therefore, there is a workaround to disable this feature for large sets of data (e.g. containing several or hundreds of thousands of items).

Basic Usage

Basic usage requires just to provide the data source (e.g. a tracker with id 1: "**tracker:1**" since [Tiki16](#), or **activitystream** also since [Tiki19](#)), and the rest will be taken as default values by the pivot table plugin, and you will be able to edit it through the PivotTable UI itself. That will allow you to display all field names

of the tracker, and will let you drag and drop them in rows or columns of the pivot table editor.

That will cover most use cases. However, if your dataset is huge, or the tracker has many fields, and some of them carrying heavy data (long text fields, or big files/images attached to the tracker items in files tracker fields), you can use an advanced syntax to filter the number of items or reduce the amount of tracker fields exposed to the pivot table to work with, so that performance of the pivot table plugin is fast again. See below for "[Advanced Usage](#)"


Example 1

After installing the [Bug_Tracker_16 profile](#) on a brand new Tiki 16, you will get a new tracker with id 1 to hold the data of the bug reports/issue tickets. When you add a few dozen items, you can use some syntax like the one indicated below to produce some demo pivot tables table with default values as a starting point, to let you start reviewing the data as wiki-wiki (quick) as possible.

This code:

```
{pivottable data="tracker:1"}
```

Would produce with the data from that profile (at the time of this writing):

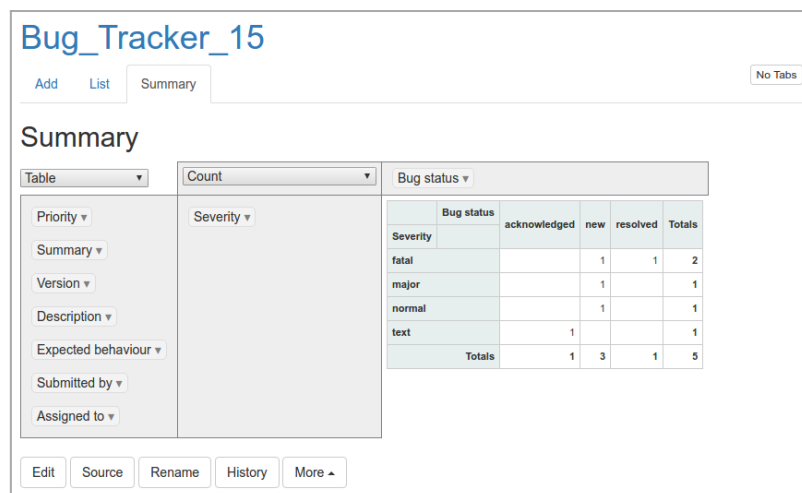


The screenshot shows the 'Bug_Tracker_15' interface. It has tabs for 'Add', 'List', and 'Summary'. The 'Summary' tab is active, displaying a pivot table. On the left, there are filters for 'Table' (set to 'Table'), 'Count' (set to 'Count'), and 'Bug status' (set to 'Bug status'). Below these are more filters: 'Priority', 'Severity', 'Version', 'Description', 'Expected behaviour', 'Submitted by', and 'Assigned to'. The pivot table itself has columns for 'Bug status' (with sub-columns 'acknowledged', 'new', 'resolved', 'Totals') and rows for 'Severity' (with values 'fatal', 'major', 'normal', 'text', and 'Totals').

Bug status	acknowledged	new	resolved	Totals
Severity				
fatal		1	1	2
major		1		1
normal		1		1
text	1			1
Totals	1	3	1	5

At the bottom of the interface are buttons for 'Edit', 'Source', 'Rename', 'History', and 'More'.

Click to expand


Once saved, you can click on any cell of the pivottable report, and you will be shown a popup with the information tracker items that produced the count for that cel, with a link to view the full record of each of the tracker items.

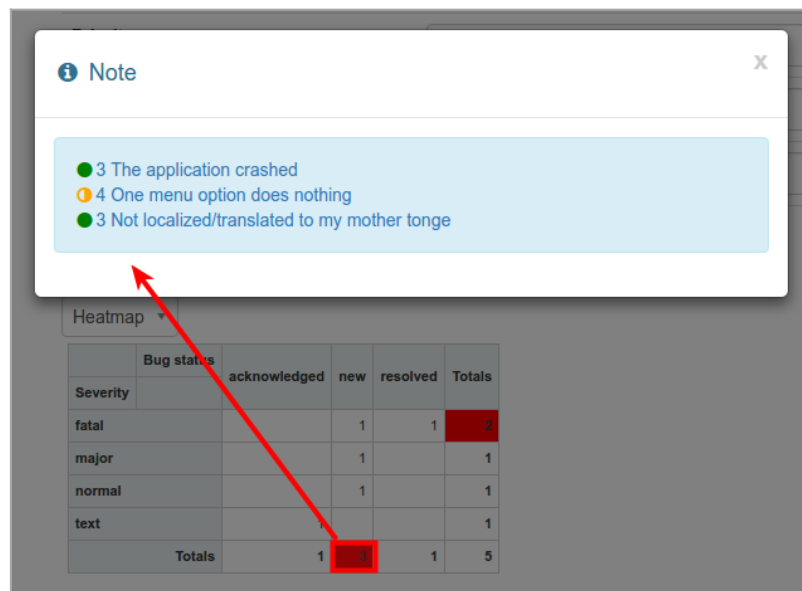

Click to expand

From there we can edit the Pivottable again through the PivotTable UI itself, and modify the variables to be used as row or column data, or add new variables in columns, change the type of table or chart produced, etc.

A table can even consider more than one value in a single dimension. The following example therefore uses both Status and Priority on the horizontal axis (meaning a column can have subcolumns):

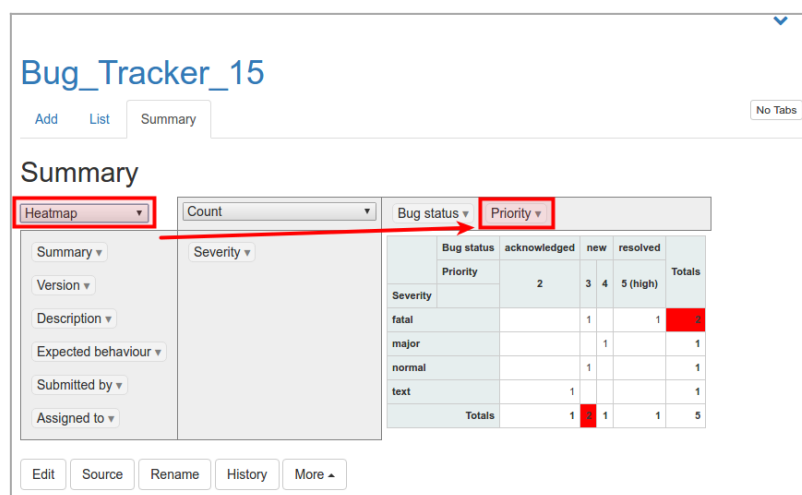

Click to expand


Example 2

A default configuration for each parameter of the plugin can also be specified. For instance, the values considered in both dimensions can be specified, using the *rows* and *cols* parameters, as in the following example (which considers 2 values on the horizontal axis, as in the previous screenshot).

This code:

```
{PIVOTTABLE(data="tracker:1" width="100%" height="500px" rows="bug_tracker_severity"
cols="bug_tracker_bug_status:bug_tracker_priority" rendererName="Heatmap"
aggregatorName="Count as Fraction of Columns" vals="bug_tracker_priority")} {PIVOTTABLE}
```

Would produce with the data from that profile (at the time of this writing):

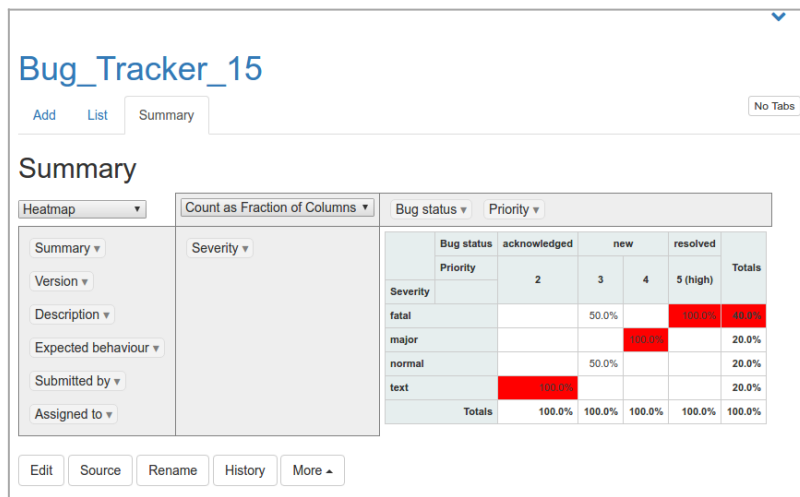

Click to expand

Example 3

You can also make some charts:


- Line Chart
- Bar Chart
- Stacked Bar Chart
- Area Chart
- Scatter Chart

For instance...

This code:

```
{PIVOTTABLE(data="tracker:1" width="400px" height="300px" rows="bug_tracker_severity"
cols="bug_tracker_bug_status" rendererName="Stacked Bar Chart" aggregatorName="Count")}
{PIVOTTABLE}
```

Would produce:

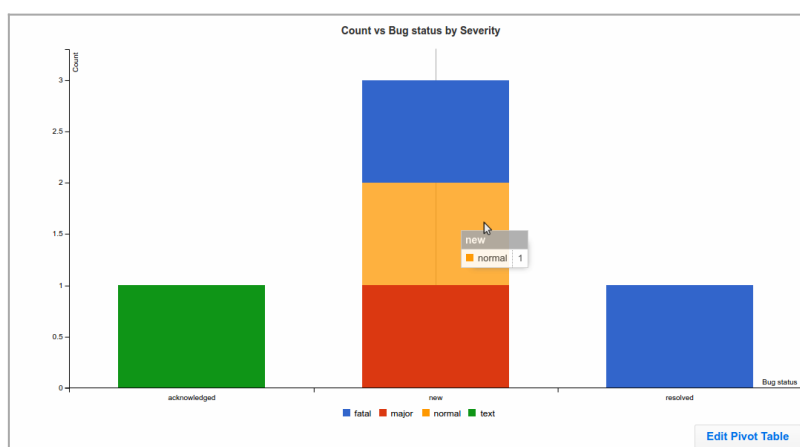

Click to expand

Example 4 (subtotals since Tiki 18)

Since [Tiki18](#) new renderers were added to allow displaying subtotal sums for rows in the table, through the [addition](#) of [subtotal.js](#) to the plugin:

- Table With Subtotal
- Table With Subtotal Bar Chart
- Table With Subtotal Heatmap
- Table With Subtotal Row Heatmap
- Table With Subtotal Col Heatmap

Bug Tracker

Add

List

Summary

Summaries

Table With Subtotal Heatmap

Table

Table Barchart

Heatmap

Row Heatmap

Col Heatmap

Line Chart

Bar Chart

Stacked Bar Chart

Horizontal Bar Chart

Area Chart

Scatter Chart

Boxplot Chart

Table With Subtotal

Table With Subtotal Bar Chart

Table With Subtotal Heatmap

Table With Subtotal Row Heatmap

Table With Subtotal Col Heatmap

Count

Severity

Bug status

Severity	Bug status	Totals
fatal	new	1
	resolved	1
major	new	1
		1
normal	new	1
		1
text	acknowledged	1
Totals		5

object_id

object_type

creation_date

Click to expand

If you click on the triangle at the left of each row name ("Severity" values, in this example), you will get the options of the next column ("Bug Status", in this example) contracted, hiding the different values of this other column, and showing only the subtotals for the field where you first clicked at (a "severity" value, or the whole column "Severity").

Table With Subtotal Heatmap

Count

Priority

Summary

Version

Description

Expected behaviour

Submitted by

Assigned to

Severity

Bug status

Severity	Bug status	Totals
fatal		2
major	new	1
normal		1
text	acknowledged	1
Totals		5

Click to expand

Example 5 (activity stream since Tiki19)

Since [Tiki19](#), you can display data from the [PluginActivityStream](#) into the Plugin PivotTable.

Minimum syntax to let the user choose options throught the PivotTable UI:

```
{pivottable data="activitystream"}
```

Example:

```
{pivottable data="activitystream" rows="object:type" cols="modification_date" width="100%"}
```



```
height="1000px" rendererName="Bar Chart" aggregatorName="Count" inclusions="{ }"
menuLimit="500" aggregateDetails="object_type"}
```

Advanced Usage

If your dataset is huge (many thousands), or the tracker has many fields (many hundreds), and some of them carrying heavy data (long text fields, or big files/images attached to the tracker items in files tracker fields), you can use an advanced syntax to filter the number of items or reduce the amount of tracker fields exposed to the pivot table to work with, so that the good performance of the pivot table plugin is preserved.

You can use the **filter** or **display** commands (both from [PluginList](#)) to indicate which items (filter) or tracker fields (display) you want to use, respectively, in the pivot table plugin.

Example:

```
{display name="tracker_field_JobType"}
```

See:

- [PluginList filter control block](#)
- [PluginList display control block](#)

Add creation_date, modification_date and status

You can also indicate if you want the creation_date, modification_date and status if the tracker items to be displayed as optional variables to be used in the report.

```
{display name="creation_date" format="datetime"} {display name="modification_date"
format="datetime"} {display name="tracker_status"}
```

Customize aggregation date values


See [Derived Attribute of a date](#)

Advanced Example 1

This code:


```
{PIVOTTABLE(data="tracker:4" rows="bug_tracker_submitted_by:bug_tracker_severity:"
cols="bug_tracker_bug_status:bug_tracker_priority:" rendererName="Heatmap"
aggregatorName="Count as Fraction of Total")) {display
name="tracker_field_bug_tracker_submitted_by" default="" } {display
name="tracker_field_bug_tracker_severity" default="" } {display
name="tracker_field_bug_tracker_bug_status" default="" } {display
name="tracker_field_bug_tracker_priority" default="" } {display
name="tracker_field_bug_tracker_version" default="" } {PIVOTTABLE}
```

Would produce with the data from that profile (at the time of this writing):

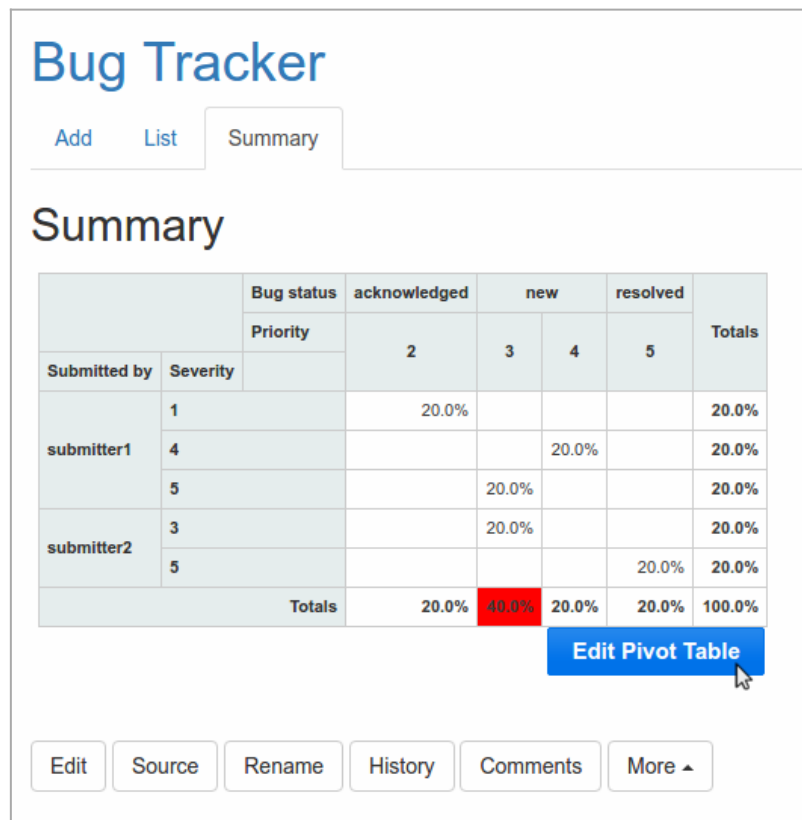

Click to expand

And once you click at the **Edit Pivot Table** button, you would see the controls to edit variable selection, but notice that you have less amount of variables to choose from than before; only the ones you have selected in the display commands of the plugin body above:

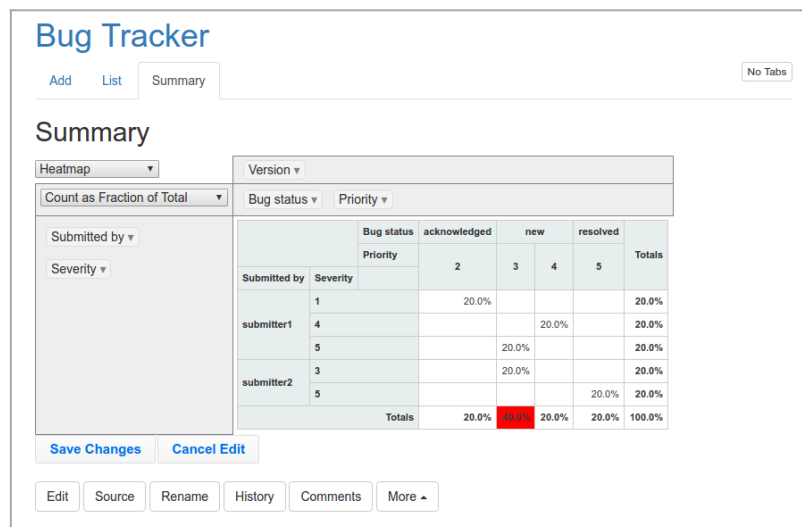

Click to expand

Advanced example 2

This code:

```
{PIVOTTABLE(data="tracker:4" rows="bug_tracker_submitted_by:bug_tracker_severity:"
cols="bug_tracker_bug_status:bug_tracker_priority:" rendererName="Heatmap"
aggregatorName="Count as Fraction of Total")} {filter field="tracker_field_bug_tracker_bug_status"
content="new"} {display name="tracker_field_bug_tracker_submitted_by" default="" } {display
name="tracker_field_bug_tracker_severity" default="" } {display
name="tracker_field_bug_tracker_bug_status" default="" } {display
name="tracker_field_bug_tracker_priority" default="" } {display
```



```
name="tracker_field_bug_tracker_version" default="" } {PIVOTTABLE}
```

Would produce the same as before, but restricting the data set to only those items tagged as new bugs (bug status is "new"):

Bug Tracker

Add

List

Summary

Summary

		Bug status	new		Totals
		Priority	3	4	
Submitted by	Severity				
submitter1	4			33.3%	33.3%
	5		33.3%		33.3%
submitter2	3		33.3%		33.3%
Totals			66.7%	33.3%	100.0%

Edit Pivot Table

Edit

Source

Rename

History

Comments

More ▾

Click to expand

Again, if you edit the pivot table, you will see that also have the restricted the number of fields, as well as the data points, that comply with your filtering criteria:

Heatmap ▾

Version ▾

object_id ▾

object_type ▾

pivotLink ▾

Count as Fraction of Total ▾

Bug status ▾

Priority ▾

Submitted by ▾

Severity ▾

		Bug status	new		Totals
		Priority	3	4	
Submitted by	Severity				
submitter1	fatal		33.3%		33.3%
	major			33.3%	33.3%
submitter2	normal		33.3%		33.3%
Totals			66.7%	33.3%	100.0%

Save Changes

Cancel Edit

Click to expand

Advanced example 3

Since Tiki 16.2, any plugin using unified index search formatter and wikibuilder (aka filter, output, display, format, etc. wiki syntax, such as [PluginPivottable](#)) now accepts `{filter field=... editable=...}` syntax to allow user enter a search value instead of hard-coding it. This means a trackerfilter-like functionality for unified index-based plugins.

You can see this feature in action if you apply profile [Bug_Tracker_16](#)

Therefore, this code:


```
{PIVOTTABLE(data="tracker:4" rows="bug_tracker_severity" cols="bug_tracker_bug_status"
rendererName="Heatmap" aggregatorName="Count")} {filter
field="tracker_field_bug_tracker_priority" editable="content"} {filter
field="tracker_field_bug_tracker_assignee" editable="content"} {filter
field="tracker_field_bug_tracker_summary" editable="content"} {PIVOTTABLE}
```

Would produce the expected pivottable report, with some fields on top to allow the user to filter results before re-drawing the table or chart:

Priority

3

Assigned to

None

Summary

crash*

Filter

Reset

	Bug status	acknowledged	new	resolved	Totals
Severity					
fatal			1	1	2
major			1		1
normal			1		1
text		1			1
	Totals	1	3	1	5

Click to expand

Related pages

- [Grouped Data](#)
- [Derived Attribute of a date](#)
- [Profiles Wizard](#)
- [Trackers](#)
- <http://nicolas.kruchten.com/pivottable/>
 - <https://github.com/nicolaskruchten/pivottable/wiki>

Aliases

[Plugin Pivot Table](#) | [Plugin PivotTable](#) | [PluginPivot Table](#) | [Pivot Table](#) | [PivotTable](#) | [Plugin Pivot Tables](#) | [Plugin PivotTables](#) | [PluginPivot Tables](#) | [Pivot Tables](#) | [PivotTables](#) | [Plugin Data Pilot](#) | [Plugin DataPilot](#) | [PluginData Pilot](#) | [Data Pilot](#) | [Data Pilot](#) |