

Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃªÂ·Â, (WYSIWYG)


ÃªÂ°œÃ¬š”

Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃªÂ·Â, (WYSIWYG, "Ã«,,ÂªÃªÂ°€ Ã«Â³Â, ÃªÂ²€ Ã«,,ÂªÃªÂ±Â° Ã¬Â»Ã«Š”
 ÃªÂ²f"Ã¬Â´Ã«Â¼Ã«Š” Ã¬~Ã«Â´Â,Ã«Â;œ Ã™ "Ã«Â©Â´Ã¬— Ã«Â³Â´Ã¬Â´Ã«Š”Ã«Â°Ã«Â;œ
 Ã¬Â,Ã¬†,,Ã«œÃ«ÂªÃ«Š” Ã¬~Ã«Â´Â,Ã¬—Ã¬,,œ Ã¬,Ã¬¬šÂ©Ã«Â´) ÃªÂ,Â°Ã«ŠÂ¶Ã¬€
 Ã¬œ,,Ã,Âª Ã«Â´Â,Ã«Â²· ÃŽÂ,Ã¬Â§´ÃªÂ,Â°Ã¬~ Ã«€Ã¬· ^Ã¬œÂ¼Ã«Â;œÃ¬Â´
 Ã¬,Ã¬¬šÂ©Ã¬ž Ã¬Â¹œÃ™ "Ã¬Â´Ã¬Â´, ÃŽÂ,Ã¬Â§´ÃªÂ,Â°Ã«ŠÂ¶Ã¬,, Ã¬Â´ œÃªÂ³ÂµÃ-
 ·Â©Ã«Â´Ã«Âª. Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃªÂ·Â, ÃŽÂ,Ã¬Â§´ÃªÂ,Â°Ã«Â´Ã¼Ã¬,Ã¬ Ã«Â° Ã«Â¶™ Ã¬—Ã¬Â«,,Â£ÃªÂ,Â° Ã«œ
 Ã¬Â´·Ã«Â³Â´Ã«Š” Ã«€Ã«Â¶€Ã«Â¶,,Ã¬~ Ã¬¬Ã«Â³Â, Ã¬,,œÃ¬¬, Ã¬œÂ´Ã¬Â§€Ã·Â
 ÃªÂ²fÃ¬ž...Ã«Â´Ã«Âª.

ÃªÂ´€Ã«Â´Â´Ã¬Â´
 "Â½

- Ã¬œ,,Ã¬Â§€
- Ã¬œ,,ÃªÂ·Â,
- Ã«€€
- Ã¬œ,,Ã,Âª
- Ã«Â´Â,Ã«Â²
-
- Ã¬œ,,Ã¬Â§€
- Ã¬œ,,ÃªÂ·Â,
- Ã-
- ŽÂ,Ã¬Â§´ÃªÂ
- Â°
- Ã¬,Ã¬¬šÂ
- ©Ã¬ž
- Ã¬œ,,Ã¬Â§€
- Ã¬œ,,ÃªÂ·Â,

Ã¬Â´ÃªÂ·Â¼Ã·Ã«Â´ÂªÃ«Â©Â´

ÃªÂ´€Ã«Â´Â´Ã¬Â´Ã«Â´Ã«,,Ã¬—Ã¬,,œ Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃªÂ·Â, Ã¬·,,Ã¬Â´Ã¬Â´½~  Ã¬,, Ã-
 Â´Ã«Â´Â´
 Ã¬Â¹Ã¬€
<http://ÃªÂ·Â´€Ã·Ã«,,Ã«Â©”Ã¬Â´,Ã¬Â´Â¼Ã¬†€/tiki-admin.php?page=wysiwyg> Ã«Â;œ
 Ã¬Â´ÃªÂ·Â¼Ã·Ã¬¬Ã¬¬œÃ¬~Âª.

Ã¬Â´Â¼Ã¬~

Ã¬Â°Ã,Âª6Ã¬—Ã¬,,œÃ«Â¶€Ã,Â°Ã«Š”, Ã¬Â°Ã,ÂªÃ«Š”
 Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃªÂ·Â, Ã¬šÂ©Ã¬œÂ¼Ã«Â;œ CKEditorÃ«Â´Ã¼Ã¬,Ã¬¬šÂ©Ã·ÃªÂ,Â°
 Ã¬¬œÃ¬ž´Ã¬~Ã¬šÂµÃ«Â´Ã«Âª. Ã¬Â´Ã¬Â´,, Ã«Â²,,Ã¬Â´,Ã«”ÃªÂ¬€ FCKeditorÃ«Â´Ã¼
 Ã¬,Ã¬¬šÂ©Ã¬~Ã¬—Ã¬šÂµÃ«Â´Ã«Âª.

Page links

Note that if the SEFURL feature is on, page links created using wysiwyg might not be automatically updated when pages are renamed. This is planned to be addressed through the future "Use Wiki syntax in WYSIWYG" feature.

Wysiwyg Editor Features

- Wysiwyg Editor is optional
Requires [Wysiwyg editor](#) (OK)
 - Wysiwyg Editor is displayed by default
 - Reopen with the same editor
- Content is parsed like wiki page
 - Content is partially wiki parsed
 - Use Wiki syntax in WYSIWYG
Requires [Ajax auto-save](#) (OK)

Wysiwyg editor skin:

Font names:

Related features

- Wiki paragraph formatting
 - ...but still create line breaks within paragraphs
- Ajax
 - Ajax auto-save
Requires [Ajax](#) (OK)

[Change preferences](#)

ã-
 žâ, ã-âš'ãªâ
 ,â°
 ã-fã-,,â,ã«,
 â'ã-—â
 • ã-œ,,ã-âš€
 ã-œ,,ãªâ·â,
 ã-
 žâ, ã-âš'ãªâ
 ,â°
 ãªâ'€ã«â!â
 -
 • WysiwygPlug
 inButton
 • ã«â²,,ãªâ·â,
 ã-™€ã-
 â-ã«âšã-,â
 -ã·â

ãªâ'€ã«â!â-: ã-œ,,ã-âš€ã-œ,,ãªâ·â,

$\tilde{A} \neg, \hat{A} \times \tilde{A} \neg \hat{A} \bullet$

$\tilde{A} \neg \in, \tilde{A} \neg \hat{A} \xi \in \tilde{A} \neg \in, \tilde{A} \hat{A} \cdot \hat{A}, \tilde{A} -$
 $\check{Z} \hat{A}, \tilde{A} \neg \hat{A} \xi' \tilde{A} \hat{A}, \hat{A}^\circ \tilde{A} \hat{A}, \hat{A}^\circ \tilde{A} \ll \check{S} \hat{A} \nexists$

$\tilde{A} \neg, \hat{A} \times \tilde{A} \ll \hat{A} \underline{a} \dots$

$\tilde{A} \underline{a} \hat{A}, \hat{A}^\circ \tilde{A} \ll \hat{A}^3 \hat{A},$

$\tilde{A} \neg, \hat{A} \alpha \tilde{A} \neg \hat{A} \bullet$

$\tilde{A} \neg \alpha \epsilon, \tilde{A} \neg \hat{A} \xi \in \tilde{A} \neg \alpha \epsilon, \tilde{A} \hat{A} \cdot \hat{A}, \tilde{A} -$
 $\check{Z} \hat{A}, \tilde{A} \neg \hat{A} \xi' \tilde{A} \hat{A}, \hat{A} \circ \tilde{A} \ll \check{S}'' \tilde{A} \neg, \hat{A} \tilde{A} -$
 $f \tilde{A} \neg, \hat{A} \neg \tilde{A} \bullet \hat{A} \tilde{A} \neg \check{Z} \dots \tilde{A} \ll \hat{A} \ll \hat{A} \alpha:$

Ã¬,,ÂÃ«Â...

ÃÂ,Â°Ã«Â³Â,

Ã¬Â' ÃÂ,Â°Ã«ŠÂ¥Ã¬,, Ã-
™ œÃ¬,,Â±Ã™ "Ã•~Ã«Â©Â'
Ã«ÂÂ"Ã«"Â

Ã¬,Â¬Ã¬ŠÂ©Ã¬žÃÂ°€

Ã¬œ,,Ã,ÂÃ¬™ €

Ã¬œ,,Ã¬Â§€Ã¬œ,,ÃÂ¬ Ã-
žÂ,Ã¬Â§'ÃÂ,Â°

Ã¬,Â¬Ã¬Â'Ã¬—Ã¬,,œ

Ã¬Â,,Ã™~Ã•~Ã«Š" ÃÂ²fÃ¬,,

Ã¬^Ã¬ŠÂ©Ã•Â©Ã«<^Ã«<Â

Ã¬,,ÂÃ¬Â •

Ã¬œ,,Ã¬Â€Ã¬œ,,ÃÂ·Â, Ã-

ŽÂ,Ã¬Â'ÃÂ,Â°ÃÂ°€

ÃÂ,Â°Ã«Â³Â,Ã¬œÂ¼Ã«Â;œ Ã-

'œÃ¬<œÃ«Â©Ã«<^Ã«<Â:

Reopen with the same editor:

~¬,,~x~«~a...

~a~,~°~«~³~,

~¬~' ~a~,~°~«š~¥~¬,, ~-
™œ~¬,,~±~™"~•~«~©~'
~a~,~°~«~³~,~¬œ~¼~«~;œ
~¬œ,,~¬~š€~¬œ,,~a~·~, ~-
ž~,~¬~š'~a~,~°~«~¥~¼
~¬,,~ ~f~·~©~«<^~«<~x

Enabling this feature ensures
the editor last used to edit a
page or item is used for the
next edit as the default

enabled

Ã¬,,ÂÃ¬Â •

Content is parsed like a wiki page:

~¬,,Âx~«Âa...

~aÂ,Â°~«Â³Â,

Enabling this feature ensures pages and items created using the Wysiwyg editor would also include Wiki parsing for plugins and inline character styles (but see next option)

Ã¬,,ÂÃ¬Â •

Content is partially wiki parsed:

~¬,,x~«a...

~a, °~«³,

Enabling this feature ensures pages and items created using the Wysiwyg editor would also include Wiki parsing for plugins BUT NOT some other wiki syntax such as inline character styles (above option must be enabled)

Ã¬,,ÂÃ¬Â •

Use Wiki syntax in WYSIWYG:

Wysiwyg editor skin:

Ã¬,,ÃÃ«Ã...

ÃÃ,Ã°Ã«Ã³Ã,

Enabling this feature is experimental in 6.x. Wiki syntax can also be used when using Wysiwyg editor, but the handy Plugin Editor then only works in Wysiwyg Source mode (note: *Ajax auto-save* must be enabled if using this feature)

Select your preferred Wysiwyg Editor Skin

Ã¬„ÂÃ¬Â •

Font names:

Related Features

Wiki paragraph formatting:

Ã¬,,ÂÃ«Â...

ÃÂ¸Â°Ã«ÂÂ¸

List of Font Names - note:
must be separated by the ;
(semi-colon character)

Enabling this feature affects
whether multiple lines appear
as a paragraph or not

•

But still create line breaks within paragraphs:

Ajax:

Ajax auto-save:

When Wiki paragraph

formatting is enabled, this option creates line breaks within paragraphs

Enabling Ajax allows page updates without having the Tiki site having to perform a browser refresh

Enabling this feature allows the Wiki service to automatically save edits

When Wiki paragraph


formatting is enabled, this option creates line breaks within paragraphs

Enabling Ajax allows page updates without having the Tiki site having to perform a browser refresh

Enabling this feature allows the Wiki service to automatically save edits

Unable to load the jQuery Sortable Tables feature.

Click the **Toolbars** button to modify the [WYSIWYG toolbars](#).

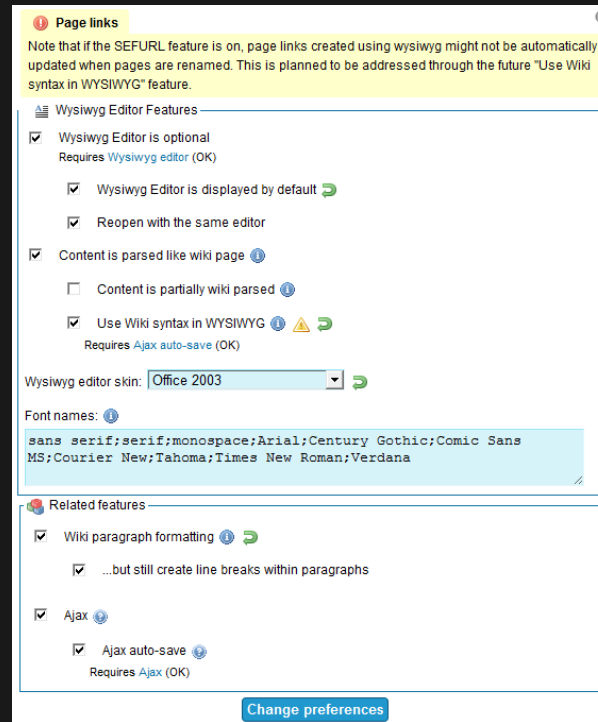

Search Engine Friendly URL

Setting

Description

Wysiwyg Editor Features

Default

Setting

Description

Wysiwyg Editor is optional:

Enabling this feature allows users to switch between WIKI and Wysiwyg editors

Wysiwyg Editor is displayed by default:

Enabling this feature selects the Wysiwyg editor as the default

Reopen with the same editor:

Enabling this feature ensures the editor last used to edit a page or item is used for the next edit as the default

Default

enabled

Setting

Content is parsed like a wiki page:

Description

Enabling this feature ensures pages and items created using the Wysiwyg editor would also include Wiki parsing for plugins and inline character styles (but see next option)

Default

Setting

Content is partially wiki parsed:

Description

Enabling this feature ensures pages and items created using the Wysiwyg editor would also include Wiki parsing for plugins BUT NOT some other wiki syntax such as inline character styles (above option must be enabled)

Default

Setting

Use Wiki syntax in WYSIWYG:

Wysiwyg editor skin:

Description

Enabling this feature is experimental in 6.x. Wiki syntax can also be used when using Wysiwyg editor, but the handy Plugin Editor then only works in Wysiwyg Source mode (note: *Ajax auto-save* must be enabled if using this feature)

Select your preferred Wysiwyg Editor Skin

Default

Setting

Font names:

Description

List of Font Names - note:
must be separated by the ;
(semi-colon character)

Related Features

Wiki paragraph
formatting:

Enabling this feature affects
whether multiple lines appear
as a paragraph or not

Default

Setting

Description

But still create line breaks within paragraphs:

When Wiki paragraph formatting is enabled, this option creates line breaks within paragraphs

Ajax:

Enabling Ajax allows page updates without having the Tiki site having to perform a browser refresh

Ajax auto-save:

Enabling this feature allows the Wiki service to automatically save edits

Default

enabled

Unable to load the jQuery Sortable Tables feature.