

Pretty Trackers

⚠ This page is significantly out of date

This page contains advice that applied to old version of Tiki (i.e. before version 21 at least).

The modern way of achieving customised views of tracker (or other) data is by using [Plugin List](#) and [Tracker Field Rules](#).

[Tiki Pretty Tracker](#) allow a site manager to design forms using [tracker](#) fields (profiled or not) as well as Tiki registration fields and have the results of each field displayed in customizable way on a [Wiki](#) page. The concept of a pretty tracker is similar to the functionality of Drupal's CCK (Content Construction Kit) or [MediaWiki infoboxes](#).



e.g. Suppose you have a movie review site. You can create a tracker that asks for:

- Title of Movie (text field)
- Review (textarea field)
- Rating (numeric field)
- poster or picture (image field)

Trackers have the ability to change the order and size of these fields, and if you try you can get your tracker to display a reasonably clean arrangement. But (as always) you want more. You want to use all your html and css skills to arrange and style these reviews in your tracker exactly like so. Thats what pretty trackers are for.

Simple example of PluginTrackerlist without pretty tracker

Most simple "default" view of the TrackerList wiki plugin example:

Name	login	Description	File	Tracker Item ID	atts
Tiki Logo	luci	Tiki Logo in SVG		1	 1

A pretty tracker uses a template to display the item

 Tiki Logo


Name: Tiki Logo
Submitted by luci
Description:
Tiki Logo in SVG

File: 
Tracker Item ID: 1
Email:

INSIDE A TRACKER OR IN A WIKI PAGE ?

There are are two ways in which pretty trackers are used.

- A Pretty Tracker (in the tracker feature) is one that uses a template to customize the display of tracker items inside the [tracker](#) feature.

*My 2ÃfÆ'Ã†â€™ ÃfÂçÃçâ€šÂ¬Ã...Â;ÃfÆ'Ãçâ, ¬Â;Ãfâ€šÃ,Âç: **never** use this method, it means you can never see you data properly without accessing the database directly. Personally i think the feature should be removed *

- A Pretty Tracker (in the wiki) does the same thing within wiki pages, including via the [PluginTrackerlist](#).

- [PluginTracker](#) can write directly to wiki pages using a template (discarding the tracker item after the page was created).

In all cases it is about displaying tracker items using a template.

Note

In tiki world a *template* can mean several similar things e.g. [content templates](#) all related to some kind of "cookie cutter" functionality. TPL is short for *Template* and they can be used interchangeably, here they both mean a page or a file having the instructions how to render some other page.

QUICK STEP BY STEP GUIDE TO A PRETTY TRACKER

Please read this [Pretty Tracker HowTo](#) first.

PARTS OF A PRETTY TRACKER

A pretty tracker has several moving parts that are chained together. Not all will require all the parts below but this is the whole list. In the table below R=Required, Y=Can be used, N=Not used.

Part	Used in Wiki
Tracker	R
Tracker Fields info	R

Used in Tracker

R

R

Description

The tracker is the table that holds the data
the columns of the table / fields of the form

How many?

Only one.

More than one

PluginTracker

Y

Tracker Input TPL

Y

Output Page

Y

Tracker Item

Y

Page Selector Field

Y

Y

N

N

Y

N

If used replaces the "create a new item" in the tracker function.

If PluginTracker is used this can controls how the input form should look

A wiki page where the single item results will show in a wiki. Usually pagename = item name (the "links to item" field of the tracker)

All trackers will have items visible in the tracker feature. For the PTW this is redundant, or only used by admins.

Must be used to make a PTW where each item is associated with a page.

1 for each input location (can be more than one)

1 for each PluginTracker

1 per item

1 per Item

1 per tracker

Display template R

Tracker Wiki Output TPL R

Tracker Item Output TPL Y

N

N

Y

For wiki only - when using the pageselector you need to provide an example of a [PluginTrackerlist](#) to be copied to the output page

A wiki page or tpl file used by the [PluginTrackerList](#). Controls how the output for all items is displayed in various wiki pages.

A wiki page or tpl file used by the tracker itself. Controls how the output for all items is displayed in the trackers item view.

1 master copy per tracker)

1 per tracker, controls all items.

1 per tracker, controls all items.


 Tip

wiki pages used as a template needs to be assigned the perm **tiki_p_use_as_template** to the group of users that you plan that they will work with the pretty tracker, in order to work properly.

HOW IT FITS TOGETHER

The following graphic depicts how a [pretty tracker in a wiki page](#) works, including how you can have a template for the input page as well as the output page.

Blue objects are seen by the end user. Green objects are behind the scenes, called by the plugins of the blue objects. Red arrows are representing the time sequence: input, processing, output.

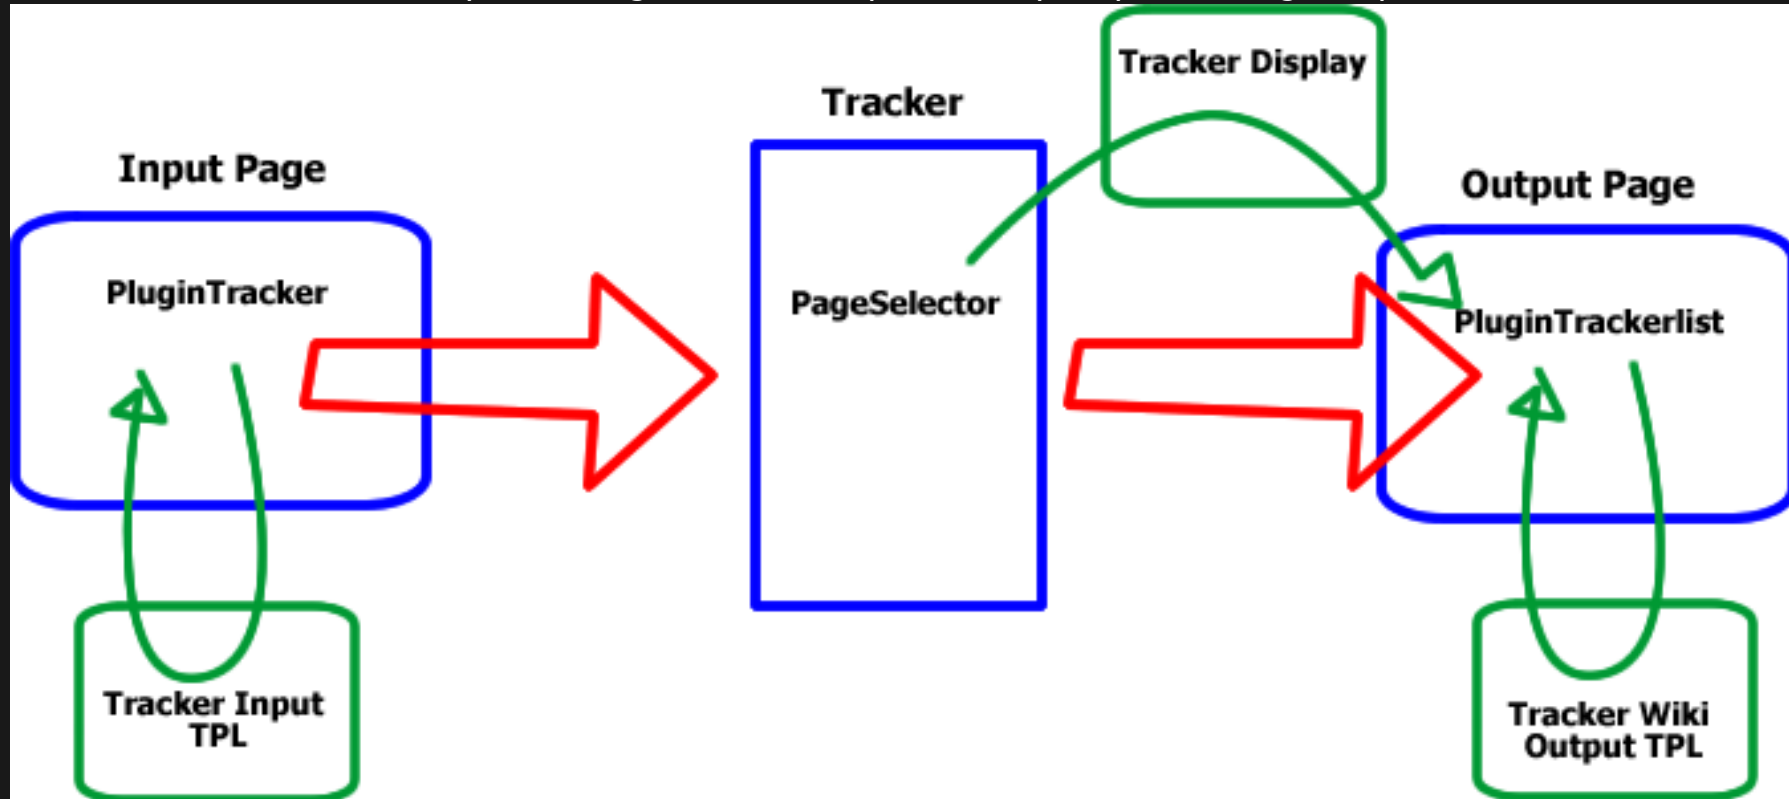


THE PRETTY TRACKER IN ACTION

When executed the sequence in the code works like this.

1. The *Input Page* calls the *PluginTracker*, which calls the *Tracker Input TPL*
2. The *Input Page* is rendered in the browser as "pretty"
3. The End user supplies the input for the tracker's fields - in other words, fills out the form, which includes providing the name to the *Page Selector* that will become the title of a new wiki page.


4. The tracker item is created in the background.
5. If the tracker has an Item Display TPL, that is called to render the tracker item.
6. If a page selector exists a wiki page is created and filled with the content of the *Tracker Display*, which is normally just the pre-configured *PluginTrackerList*.
7. When the wiki page is visited, *PluginTrackerlist* calls up the fields from the tracker, and the *Tracker Output TPL* and combines them together to render the "pretty" page as seen by the end user.

 Note

Pretty Tracker does not work when the option 'mirror tables' in Tracker Settings (Admin) is set

TUTORIAL - A SIMPLE PRETTY TRACKER.

The step-by-step [tutorial](#) that follows will allow you to create a **pretty tracker within the trackers function**. This is a recommended first step to creating a more complicated pretty tracker. In this tutorial you will display a pretty tracker item using an *Item Output TPL*. If you get that far, you can use the template made here as the basis for a [Pretty Tracker in a Wiki Output TPL](#).

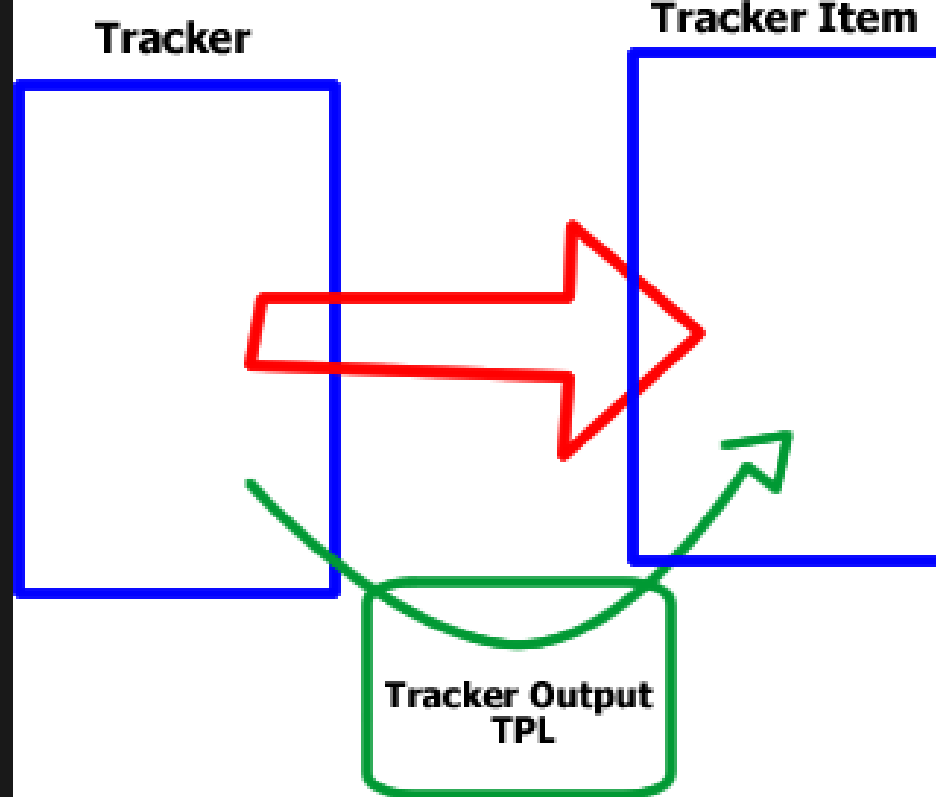

Note: This tutorial assumes you know how to set up a tracker.

1. Create a normal tracker. You can "prettify" an existing tracker if you like. Please consult the docs on [trackers](#) to learn how if necessary. Here the Tracker name is *Simple Tracker*
 - * Don't fill in the "Wiki page to display an item" yet (this is the last option in the *edit tracker* panel). We will fill that later.
 - * Note what tracker ID you have created. Here we will say it is *trackerID=8*
2. Create fields for your tracker. For now, don't spend time trying to change how they are displayed, or what order they are in or what size they are.
3. Create a few test items for your tracker if they don't already exist. The point here is to get to

step 4 as quickly as possible. You can always add more fields later.

4. Go back and take a look at *tiki-view_tracker.php?trackerId=8* (substitute your tracker ID in the url instead of 8) to see your tracker's items. All there? Good.
5. **List your Tracker Field ID's** Open a second browser and navigate back to *tiki-admin_tracker_fields.php?trackerId=8* by clicking the *Fields* button. Keep this page open while you work on the next steps.
6. **Creating the Output TPL** Create a new wiki page called *Simple Tracker Output TPL* (replace 'Simple Tracker' with the name of your tracker. Don't be creative, use this naming convention to avoid confusion later.
7. In the new wiki page, key in a list of variables and field names using all the fieldID's you see in that other browser window. Type in the fieldIDs as variables just like they are below.

```
{ $f_12 } Username { $f_13 } City { $f_14 } Photo { $f_15 } Join Date { $f_16 } Wants to Buy  
{ $f_17 } Wants to Sell { $f_18 } GroupName
```

So what we have here are placeholders that will be replaced by the information belonging to the individual tracker item field. The curly bracket things are the variables, that is what matters. You can delete the names after, but you need them for now to avoid confusion.

8. Now go nuts with your HTML, Smarty, and CSS skills. By editing *Simple Tracker Output TPL* you


are creating a web page that presents all the fields in your tracker in a nice and pretty way.

Copy and paste each variable from your list into the appropriate spot. Save.

9. Add special [object permissions](#) to this page. Assign the perm `tiki_p_use_as_template` to anonymous and registered, or whatever groups will be viewing the tracker. Save. You may have already set this using categories or global permissions, but now you are sure it will work.

10. Now (is your other window still open? Hope So). Go back to `tiki-admin_trackers.php?trackerId=8` by clicking on the *Trackers* button, then click on the action wrench icon for tracker 8 and click on *Properties* in the popup. Within the modal popup click on *Section Format* to expand that section and perform the following:

1. Set the *Section format* field to *Configured*

2. Set "Template to display an item" to be `wiki:Simple Tracker Output TPL`. (you replaced 'Simple Tracker' with your trackers' name right?)
*My 2ÃfÆ'Ã†â€™ ÃfÂçÃçâ€šÂ¬Ã...Â;ÃfÆ'Ãçâ,¬Å;Ãfâ€šÃ,Âç: **never** use this method in production, put this back to flat or tabs and use [a wiki page to display the items](#) otherwise it means you can never see you data properly without accessing the database directly. *

3. Save

11. Now go to `tiki-view_tracker.php?trackerId=8`, and select an item. How is this item displayed

now? Kinda Pretty? you will probably have to edit your template page a couple more times to get the best result. You may also have to visit *tiki-admin_tracker_fields.php?trackerId=8* to resize the fields you created (it doesn't make much sense to spend time on that till now.)

12. Tweak until satisfied.

DYNAMIC PRETTY TRACKERS

So far the tracker inputs and outputs have been rather static. It is not possible to change a field according to the value of another field, for example.

But what if you want to have different questions or different answers displayed in your template based on the information in that item? Basic conditional display is covered by [PluginTrackerToggle](#). Using pretty trackers and JavaScript, more advanced behavior is possible for those who know HTML, DOM and JavaScript. The following form uses the jQuery library and [PluginJq](#):

[Log in](#) as [registered user](#) to see the form in action in this [dynamic tracker example](#).

The layout of this pretty tracker is defined in the template page [Dynamic tracker example template](#), which also contains the code to make the form dynamic. The code below will use field numbers to control these field.

Field number	Name
121	Content type

▲ Syntax changed since Tiki 7

Keep in mind that default syntax for tracker fields changed since **Tiki7**, so that when referring them from within plugin jquery, you have to update the syntax.

Tracker field IDs and names have changed to improve consistency: all tracker fields now use **ins_XX**, where **XX** is the fieldId.

For more information, read: http://doc.tiki.org/Tiki7#Upgrade_notes

CONDITIONAL FIELDS

The form contains two alternative fields which are initially hidden. When a radio button is selected, the corresponding field appears. Since none of these fields is always required, the tracker fields are not defined as mandatory. But this is emulated using a JavaScript check when submitting the form.

The initial state is achieved with the following code:

```
$("#fileprompt").hide(); $("#urlprompt").hide();
```

fileprompt and *urlprompt* are the identifiers of DIV elements defined in the template to allow controlling the display of the 2 fields and their label:

```
{DIV(type="div",id="fileprompt")} File: {$f_122} {DIV} {DIV(type="div",id="urlprompt")} URL: {$f_123} {DIV}
```

The following code handles selection of a radio button, showing a field and making sure the other one is hidden:

```
$("#input[name='track_121']").change(function(){ if ($(this).filter(":checked").val() === 'File') { $("#urlprompt").hide();  
    $("#fileprompt").fadeIn(); } else { $("#fileprompt").hide(); $("#urlprompt").fadeIn(); } });
```

The function is executed when field 121 is changed. When the function is executed, one of the 2 blocks is run depending on the value of the selected (or "checked") radio button.

DISPLAY A MESSAGE WHEN A CERTAIN VALUE IS SELECTED

The user needs to fill a boolean field, but one value is not normal. A message is displayed if the user selects "No". The following code does this adding a handler to the change event on the select element:

```
$("#select[name='track_124']").change(function(){ if ($(this).find("option:checked").attr("value") === 'No') { alert("Then go do  
    your homework."); } });
```

USING A PRETTY TRACKER IN A WIKI PAGE

see [Pretty Tracker in a Wiki Page](#)

CONDITIONAL DISPLAY OF INPUT FIELDS

SYNTAX TIPS

PRE-DEFINED VARIABLES

`{ $f_created }`: created date
`{ $f_status_input }`: status input field (for plugin tracker with `showstatus="y"`)
`{ $f_status }`: status (output)
`{ $f_itemId }`: the item id
`{ $f_lastmodif }`: last modified date (this will display unix date, for human readable date look below)
(In Tiki 8 onwards) `{ $itemoff }`: the iteration number of each item
`{ $tr_offset }`: the offset of the item, i.e. this is the nth item of the total number of x items

REGISTRATION PRE-DEFINED VARIABLES

You can easily integrate registration information in your pretty tracker using the proper syntax

`{ $register_login }`
`{ $register_email }`
`{ $register_pass }`
`{ $register_pass2 }`
`{ $register_passcode }`
`{ $register_groupchoice }`
`{ $register_antibot }`

See http://doc.tiki.org/User-Tracker#Using_Pretty_Trackers_to_generate_the_Registration_Tracker

SYNTAX MODIFIER

Modifiers can be applied using "|" (pipe).

DATE MODIFIER

`{$_f_lastmodif|tiki_short_date}` will display human readable date only.
`{$_f_lastmodif|tiki_short_datetime}` will display human readable date and time.
etc...

VIEW / EDIT MODIFIER

Show data in view mode (not edit mode)

```
{$_f_122|output}
```

This is reported not to work within a wiki table
Related commit: <http://sourceforge.net/p/tikiwiki/code/31403>

LIMITATIONS TO USING WIKI PAGES

There are certain limitations to the use of pretty tracker variables when using a wiki page as the template, for example:

- An `$_f_` variable won't be interpreted properly when used as a parameter value for certain plugins (at least for [PluginList](#)), due to the way the plugin is processed

The solution in this case is to use a Smarty template file as the template rather than a wiki page.

Related

See:

- [Pretty Tracker in a Wiki Page](#)
- [PluginTrackerList](#)
- [PluginList](#) and [PluginCustomSearch](#)
- [Semantic Alias](#) to see how you can link something like ((Project:15)) to a pretty tracker page.

Aliases: [PrettyTracker](#) | [PrettyTrackers](#) | [Pretty Trackers](#) | [Pretty+Tracker](#)