

Packages

Also called the Composer Web Installer, and introduced in [Tiki18](#), this feature is for the installation and management of external software packages using [Composer](#).

Overview

Composer is used in the Tiki code development process to import and manage external software such as jQuery and Bootstrap. But some software cannot be packaged with Tiki due to an incompatible license, or shouldn't necessarily be packaged with Tiki by default because of the software's specialized nature or niche application. So it is a natural step for Tiki site administrators to be able to use Composer to install and manage external software specifically for their site after the site is installed.

Package list


- Please see: <https://packages.tiki.org/>
- For developers:
 - [Code to build packages](#)
 - [Where to modify package availability in the Tiki code](#)

Use

The interface for Packages is located at the site's <tiki-admin.php?page=packages> page. The Packages admin page has four sections, displayed in tabs — **Packages Installed**, **Install Other Packages**, **Packages Bundled**, and **Diagnose**. These sections are described below:

Packages Installed

This list shows packages that have been installed via this feature. The details for each package include package name, version required, status, and version installed, plus a remove button for each. The version required is the minimum version required by Tiki, so the version installed must be that version or a newer one. If the Packages feature hasn't been used yet, then of course the list will be empty.

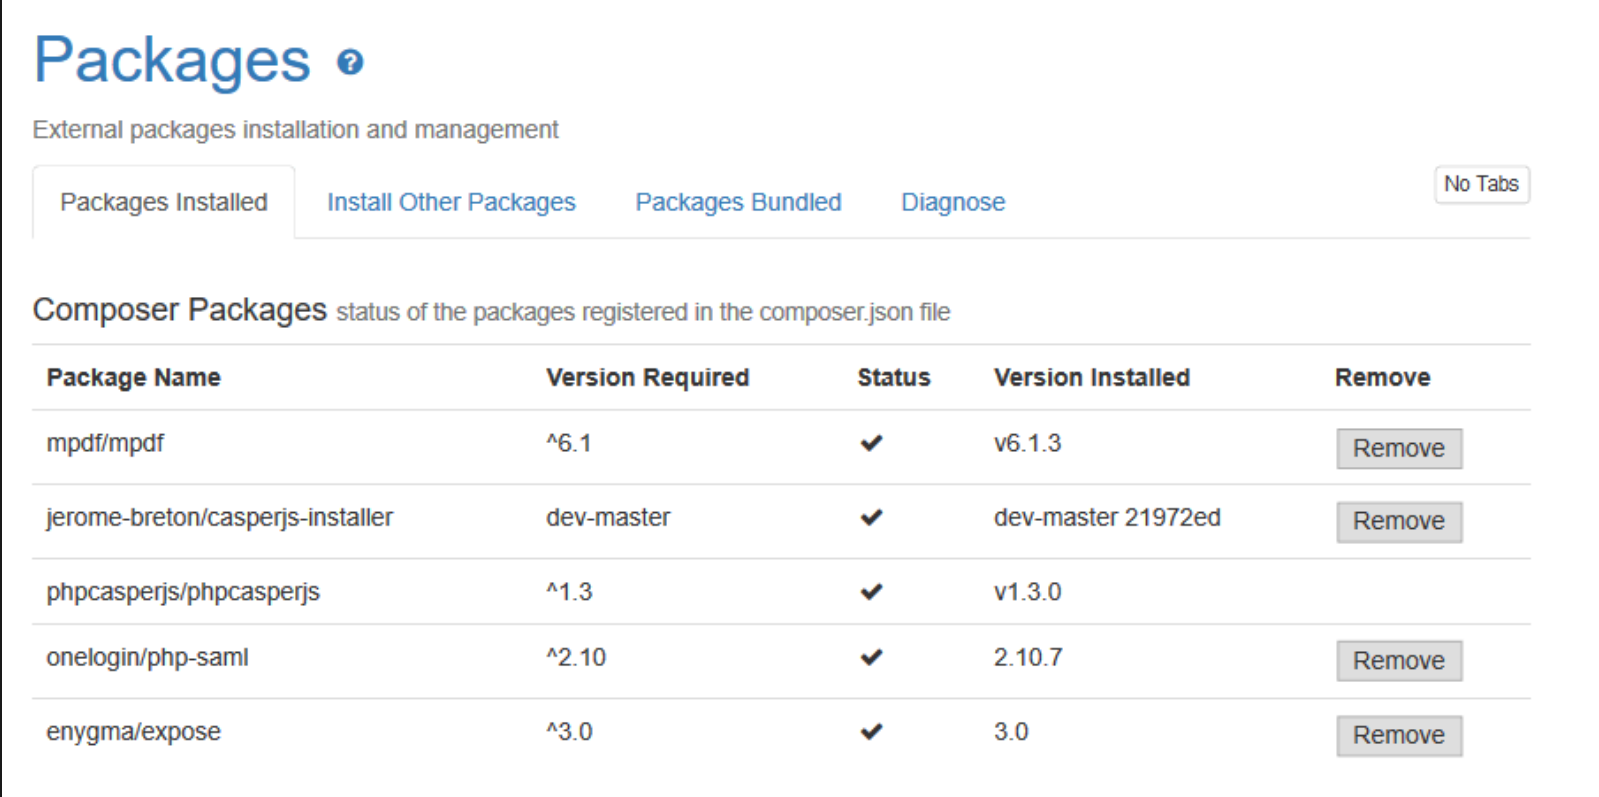

The screenshot shows a web interface titled "Packages" with a subtitle "External packages installation and management". It features a navigation bar with tabs: "Packages Installed" (active), "Install Other Packages", "Packages Bundled", and "Diagnose". A "No Tabs" button is also present. Below the navigation is a section for "Composer Packages" with a subtitle "status of the packages registered in the composer.json file". A table lists the installed packages with columns for Package Name, Version Required, Status, Version Installed, and a Remove button.

Package Name	Version Required	Status	Version Installed	Remove
mpdf/mpdf	^6.1	✓	v6.1.3	Remove
jerome-breton/casperjs-installer	dev-master	✓	dev-master 21972ed	Remove
phpcasperjs/phpcasperjs	^1.3	✓	v1.3.0	
onelogin/php-saml	^2.10	✓	2.10.7	Remove
enygma/expose	^3.0	✓	3.0	Remove

The status column shows a success icon (✓) if the package is installed, or a warning icon (⚠) if it is missing. If the package is missing, you can click the "Fix Missing Packages" button that is displayed and Tiki will try to install the package again.

Manual install (FTP)

If for some reason, the web-based package installer is not working for you, you can use the FTP alternative explained at: <https://packages.tiki.org/>

Install Other Packages

This section shows packages that are available to be selected and installed.

Some examples include:

- [PhantomJS and CasperJS](#)
- [mPDF](#)
- [Expose](#)
- [SAML](#)

Packages

External packages installation and management

[Packages Installed](#)
[Install Other Packages](#)
[Packages Bundled](#)
[Diagnose](#)
No Tabs

Composer Packages These packages have been identified as required by one or more features.

Package Name	Version	Licence	Required by	Install
jerome-breton/casperjs-installer	dev-master	MIT	wikiplugin_casperjs	Install Package
enigma/expose	^3.0	MIT	ids_enabled	Install Package
mpdf/mpdf	^6.1	GPL	Tiki Print	Install Package
onelogin/php-saml	^2.10	MIT	saml_auth_enabled	Install Package

There appear to be some optional packages that can be installed

In the list above, there are optional packages that may be installed in order to use the Tiki features that require the package.

Install packages from the administrator interface

Composer was not detected. Please follow the manual instructions.

Install packages manually

Make sure `composer` is installed.

Composer can be installed manually, in the host machine, by following the instructions from the [Composer](#) website.

The script `setup.sh` that is included in the Tiki distribution can be run to make sure composer is installed. In this case, composer will be installed as `temp/composer.phar`. Below is an example of how to do this in a Linux-like operating system:

```
bash ./setup.sh composer
```

Make sure there is a `composer.json` file in the root of the website.

If there is not already a `composer.json` file, then create one. The sample `composer.json.dist` that comes with Tiki can be used as a starting point. Below is an example of how to do this in a Linux-like operating system:

```
cp composer.json.dist composer.json
```

Install the package.

After all the steps above (that only need to be performed once), packages can be installed by issuing a command `composer require package:version` for each package that is to be installed. Below is an example of how to do this in a Linux-like operating system:

```
php temp/composer.phar require --update-no-dev --prefer-dist psr/log:^1.0
```

Install Other Packages

Note: It may happen that mxGraph is not available on this list, so to add it to your Tiki installation, follow this [link](#), it contains all the information you will need to add a package if it is not available for installation through the graphical interface.

INSTALL OTHER PACKAGES SECTION FEEDBACK


[+]

OTHER INFORMATION

Currently those that are available are listed in the local composer.json file and fetched from <https://packagist.org>.

Packages Bundled

This section lists the external software packages that are bundled with the core Tiki files, so are available for use in a fresh Tiki site. This list is for information purposes only and there's no interface here to make changes.

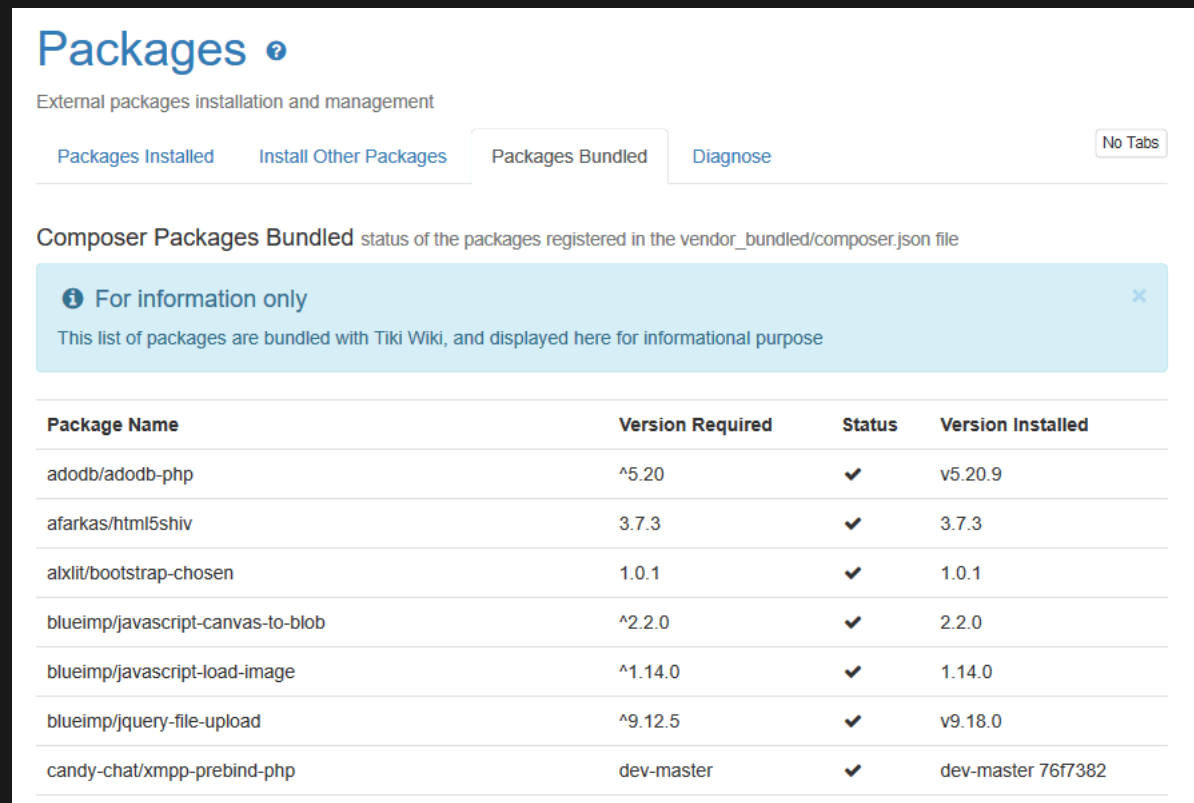


The screenshot shows the 'Packages Bundled' section of the Tiki interface. It features a header with the title 'Packages' and a sub-header 'External packages installation and management'. Below this are four tabs: 'Packages Installed', 'Install Other Packages', 'Packages Bundled' (which is active), and 'Diagnose'. A 'No Tabs' button is also present. The main content area is titled 'Composer Packages Bundled' and includes a note that the status is based on the 'vendor_bundled/composer.json' file. A light blue information box states: 'For information only. This list of packages are bundled with Tiki Wiki, and displayed here for informational purpose'. Below this is a table with four columns: 'Package Name', 'Version Required', 'Status', and 'Version Installed'. The table lists seven packages, each with a checkmark in the 'Status' column.

Package Name	Version Required	Status	Version Installed
adodb/adodb-php	^5.20	✓	v5.20.9
afarkas/html5shiv	3.7.3	✓	3.7.3
axlit/bootstrap-chosen	1.0.1	✓	1.0.1
blueimp/javascript-canvas-to-blob	^2.2.0	✓	2.2.0
blueimp/javascript-load-image	^1.14.0	✓	1.14.0
blueimp/jquery-file-upload	^9.12.5	✓	v9.18.0
candy-chat/xmpp-prebind-php	dev-master	✓	dev-master 76f7382

Packages Bundled

Diagnose

The "Diagnose Composer" button can be clicked to run Composer and test the output. If Composer isn't found for some reason, there will be a message to that effect.

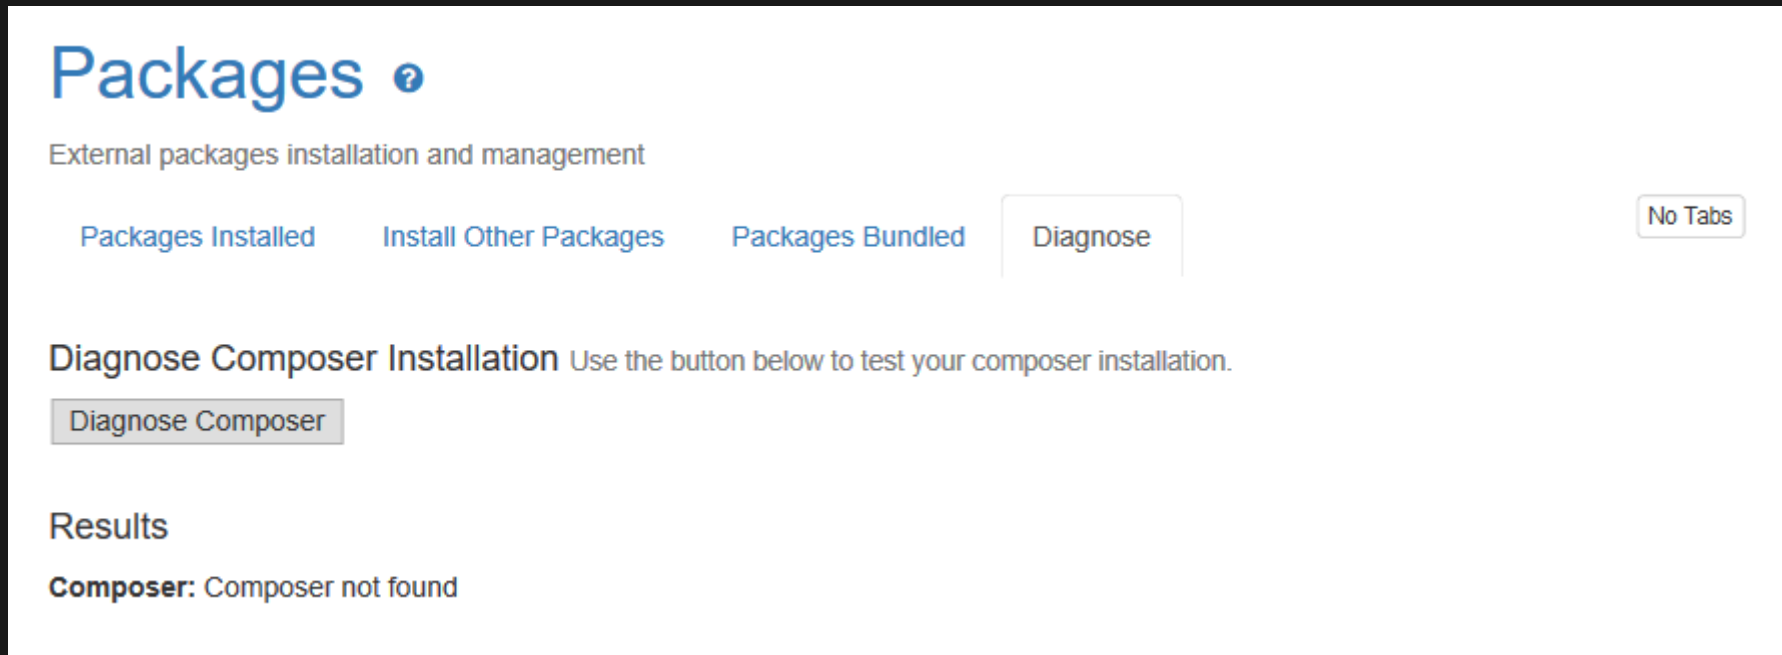

The screenshot shows a web interface for package management. At the top, the word "Packages" is displayed in blue with a help icon. Below it, the text "External packages installation and management" is visible. A navigation bar contains four tabs: "Packages Installed", "Install Other Packages", "Packages Bundled", and "Diagnose". A "No Tabs" button is located on the right. Under the "Diagnose" tab, the heading "Diagnose Composer Installation" is followed by the instruction "Use the button below to test your composer installation." Below this is a "Diagnose Composer" button. Under the "Results" section, the message "Composer: Composer not found" is displayed.

Diagnose Composer - Composer Not Found

Normally, Composer will be found and run, and so some information will be shown here.

Packages

External packages installation and management

Packages Installed

Install Other Packages

Packages Bundled

Diagnose

No Tabs

Diagnose Composer Installation use the button bellow to test your composer installation

Diagnose Composer

Results

Composer: /var/www/virtual/trunk.notre.website/temp/composer.phar

Composer diagnose output

```
Checking composer.json: WARNING
No license specified, it is recommended to do so. For closed-source software you may use "proprietary" as license.
require.jerome-breton/casperjs-installer : unbound version constraints (dev-master) should be avoided
Checking platform settings: OK
Checking git settings: OK
Checking http connectivity to packagist: OK
Checking https connectivity to packagist: OK
Checking github.com rate limit: OK
Checking disk free space: OK
Checking pubkeys: FAIL
Missing pubkey for tags verification
Missing pubkey for dev verification
Run composer self-update --update-keys to set them up
Checking composer version: OK
```

Diagnose Composer - OK

Troubleshooting

YOUR REQUIREMENTS COULD NOT BE RESOLVED TO AN INSTALLABLE SET OF PACKAGES

If you run into errors such as the following, try uninstalling and re-installing the packages

```
= Composer execution output:
```

```
Errors:
```

```
./composer.json has been updated
Loading composer repositories with package information
Updating dependencies
Your requirements could not be resolved to an installable set of packages.
```

```
Problem 1
```

- Conclusion: don't install mpdf/mpdf v8.0.5
- Conclusion: don't install mpdf/mpdf v8.0.4
- Conclusion: don't install mpdf/mpdf v8.0.3
- Conclusion: don't install mpdf/mpdf v8.0.2
- Conclusion: don't install mpdf/mpdf v8.0.1
- Conclusion: don't install mpdf/mpdf v8.0.0
- Conclusion: don't install mpdf/mpdf v8.0.5
- Conclusion: don't install mpdf/mpdf v8.0.4
- Conclusion: don't install mpdf/mpdf v8.0.3
- Conclusion: don't install mpdf/mpdf v8.0.2
- Conclusion: don't install mpdf/mpdf v8.0.1
- Conclusion: remove setasign/fpdi 1.6.2
- Installation request for mpdf/mpdf ^8.0.0 -> satisfiable by mpdf/mpdf[v8.0.0, v8.0.1, v8.0.2, v8.0.3, v8.0.4, v8.0.5].
- Conclusion: don't install setasign/fpdi 1.6.2
- mpdf/mpdf v8.0.0 requires setasign/fpdi ^2.1 -> satisfiable by setasign/fpdi[v2.1.0, v2.2.0, v2.3.0, v2.1.1].
- Can only install one of: setasign/fpdi[v2.1.0, 1.6.2].
- Can only install one of: setasign/fpdi[v2.1.1, 1.6.2].
- Can only install one of: setasign/fpdi[v2.2.0, 1.6.2].
- Can only install one of: setasign/fpdi[v2.3.0, 1.6.2].
- Can only install one of: setasign/fpdi[1.6.2, v2.1.0].
- Can only install one of: setasign/fpdi[1.6.2, v2.2.0].
- Can only install one of: setasign/fpdi[1.6.2, v2.3.0].
- Installation request for setasign/fpdi (locked at 1.6.2) -> satisfiable by setasign/fpdi[1.6.2].

```
Running update with --no-dev does not mean require-dev is ignored, it just means the packages will not be installed. If dev requirements are blocking the update you have to resolve those problems.
```

```
Installation failed, reverting ./composer.json to its original content.
```


Future development

Initially, the focus will be files at <https://packagist.org/>, but later this feature is intended to be expanded to include importing themes, libraries formerly hosted at mods.tiki.org, language files, and more.

Related

- See also <https://dev.tiki.org/Composer-Web-Installer>
- [Profiles](#)
- “Packaging” Composer packages
- [About Tiki Packages in Tiki 18.0 LTS and why I support this project. And mods.tiki.org can now be scheduled for retirement \(Marc Laporte\).](#)
- <https://gitlab.com/tikiwiki/tiki-packages-build>

Page alias

- [Composer Web Installer](#)
- [Package](#)