

PluginJS

Use the JS [wiki plugin](#), introduced in [Tiki3](#), to include JavaScript files or JavaScript code in a wiki page.

Alternatives: [PluginHTML](#) or [PluginJQ](#)

Parameters

Add JavaScript code or files

Introduced in Tiki 3.

[Go to the source code](#)

Preferences required: wikiplugin_js

Parameters	Accepted Values
(body of plugin)	
file	url

Description	Default	Since
JavaScript code		
JavaScript filename		3.0

lateload

(blank)

y

n

Late load, use headerlib

9.1

Examples

Basic syntax

Insert a javascript file or/and some javascript code. `{JS(file='file.js')}javascript code{JS}`

The file.js file is in this case in the Tikiroot.

This will produce the following code for your Tiki site:

Note that it has to be surrounded by quotes.

```
{JS(file="http://example.org/tiki.js")} {JS}
```

`{REMARKSBOX(title="Tip" type="tip")}`Literal strings will have `<`, `>`, and `&` converted into HTML entities (and possibly other characters as well), so if your javascript is dealing with HTML (e.g. via `document.write()`), you probably need to convert them back.

Example 1

To include JavaScript code, use:

```
{JS()} var.... function ... .. {JS}
```

This will produce the following code for your Tiki:

```
var....  
function ...  
...
```

 Tip


The file is inserted before the param, if you need the reverse order use 2 calls to the JS plugin.

Example 2

This code:

```
{JS()}alert('coucou'){JS}
```

Would produce a pop up window that the user would have to click on "Accept" button ("D'accord" in this localized example) to make it disappear:

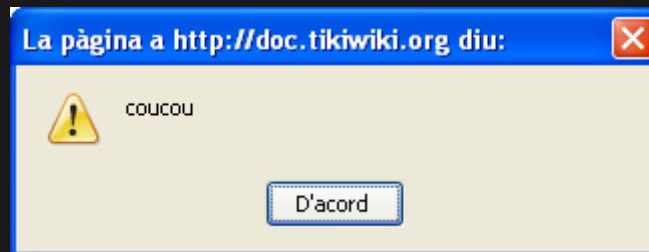

Aliases

- Mod js